Champion®
The Dishwashing Machine Specialists

PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____

CG

GLASSWASHERS ROTARY SERIES



Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.

OPTIONS & ACCESSORIES

- ☐ Drain tray and waste collector (DFWC)
- ☐ Quick disconnect package (incl. casters)
- ☐ Casters; set of four (2 locking, 2 regular)
- ☐ Bar Mat (Size 23 5/8" x 17")
- ☐ Integrated Chemical Monitoring – Optimal results for washing and sanitizing (factory installed only)

STANDARD FEATURES

- **Compact 24" Wide Design –** Space-efficient footprint for versatile installation.
- **Multi-Speed Conveyor System (Low/Med/High) –** Direct-drive conveyor motor with anti-jam protection and adjustable speed settings to deliver premium results across varying soil conditions and glassware types.
- **Touchless Conveyor Shut-Off –** Advanced sensor technology helps protect delicate glassware from damage.
- **AI Water Quality Monitoring –** Automatically refreshes wash water as needed during operation without interruption.
- **38% Less Water Consumption –** Industry-leading water efficiency for reduced water usage.
- **Integrated Tank & Wash Chamber –** Operator-focused design allows convenient access during daily operation.
- **Smart Controls with Onboard Diagnostics –** Integrated machine diagnostics for simplified monitoring and operation.
- **2" LCD Display –** Intuitive interface for easy operation.
- **Automatic Fill, Clean & Drain –** Fully automated functions require no operator intervention.
- **Revolutionary EZ-Clip Wash & Rinse Arms –** Innovative design allows quick removal for easy cleaning and maintenance.
- **Solid-State Sensors –** Eliminates mechanical switches and requires no manual adjustments.
- **Self-Flushing Rinse Chamber –** Strategically directed water flow helps minimize soil buildup and reduce cleaning requirements during operation.

NSF c UL us Certifications apply to the machine only.

SPECIFIER STATEMENT

Specified unit will be Champion model CG Rotary Type, fully automatic glasswasher. Unit shall include integrated controller complete with LCD display providing system status and Operator feedback, automatic fill, clean, self flushing rinse chamber, draining features with a multi speed conveyor for adjustable wash settings, touchless conveyor shut-off, automated system diagnostics and AI water quality monitoring. Additional standard features include 24" wide cabinet, electric tank heater, removable and cleanable upper and lower wash/rinse arms, polypropylene conveyor, splash curtain, double wall construction detergent, rinse and sanitizing pumps with capacity to store three 1-gallon containers.

1 year parts and labor warranty.

In the USA:
3765 Champion Blvd, Winston-Salem, NC 27105
Tel: (336) 661-1556 Fax: (336) 661-1979
www.championindustries.com

Rev. 10/2026 Printed in U.S.A.

APPROVAL: _____ DATE: _____

Champion®
The Dishwashing Machine Specialists

CG

GLASSWASHERS ROTARY SERIES

Dimensions shown in inches

SPECIFICATIONS

Capacities (hr)
2-1/2" glasses/hr. 1200

Conveyor Movement
CG Clockwise

Water Consumption
Cold Water (approx.) 1.6 gpm
Hot Water (initial fill) 3 Gal
(Max. use – approx. 10 gph)

Temperature °F
Inlet water (hot) min/max 140-160
Inlet water (cold) 75

Heating
Tank heat, electric, (kW) 3

Clearance
Through machine (inches) 12

	Uncrated	Crated
Height*	39"	46-1/2"
Width	23-7/8"	27"
Depth	24-1/2"	27-1/2"
Ship Wt. LBS.	156	176
*Adjustable foot height 1-1/4"		

Utilities

	Electrical 208-220/60/1, 15 AMP
1	**Hot Water** 1/2" IPS. Flow pressure 25-95 psi
2	**Cold Water** 1/2" IPS. Flow pressure 25-95 psi
3	**Drain** 1-1/2" tailpiece. Connect to drain size according to local plumbing code.

Warning: Plumbing, electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.


Note: CG models supplied with 6 ft. plug-in cord (NEMA 6-15P).

Plumbing Notes: Because of the variation in house-supplied steam and water pressures, steam and water pressure regulating valves (PRVs) may be needed. (Water PRV is standard on machines with booster.) The PRVs can either be purchased from Champion or obtained locally.


Champion does not endorse using on-demand (tankless) water heating systems, as well as PEX and other plumbing materials that may limit water flow, as these could impair machine performance. For optimal results, we recommend using appropriately sized conventional hot water tanks and standard copper water supply lines that adhere to our specifications. Not following these recommendations may void the manufacturer's warranty.

Water hardness of 3 grains/US Gal (0.83 Imp Gal) - 5.3 Mg/L or less


Dimensions shown in inches and [millimeters]

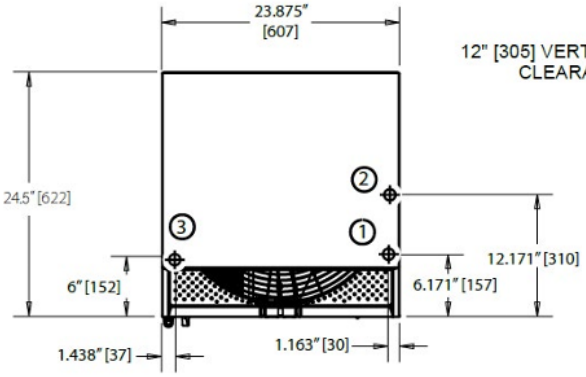

Plan View

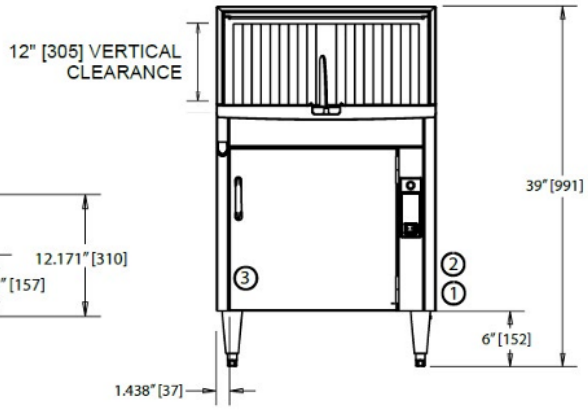

Front View

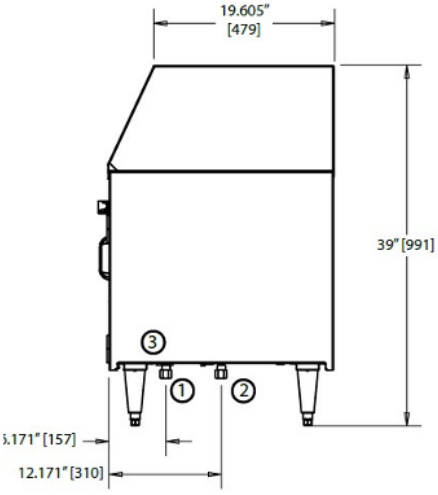

Side View

In the USA: 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | **www.championindustries.com**

Rev. 10/2026 Printed in U.S.A.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

WELBILT
an Ali Group Company