Champion®
The Dishwashing Machine Specialists

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

# UL 130

## UNDERCOUNTER LOW TEMPERATURE




*Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.*

## OPTIONS & ACCESSORIES

- ☐ Additional Dish Racks
  - ☐ Peg
  - ☐ Flat
- ☐ 17" Stand Stainless Steel
- ☐ 8" Leg Stand
- ☐ 1" Roller Kits available (includes 4 casters)
- ☐ Chemical alarm kit (mounted)

## STANDARD FEATURES

- **Wash Refresh™**
  Automatically drains the water for the next cycle, ensuring heavily soiled items are always sanitized with new wash water
- **Pumped Drain**
- **Stemsure™**
  Soft start to protect glasses and dishes from chipping and breaking
- **Door Safety Switch**
- **Low-Water Tank Heat Protection**
- **Built-In Detergent, Rinse-Aid, And Sanitizer Dispensing Pumps**
- **Wash Pump, 1 HP Motor**
- **Electric Tank Heater**
- **Upper & Lower Interchangeable Wash/Rinse Spray Arms**
- **316 Stainless Steel Tank**
  for improved corrosion resistance, an industry exclusive, all 130, 230 and 330 tanks are stainless steel
- **Top Mounted Controls**
- **Stainless Steel Top And Side Panels**
- **Single Phase Connection**
- **Stainless Steel Construction**
- **115v Power Cord**

## SPECIFIER STATEMENT

Specified unit will be Champion model UL-130 undercounter low temperature dishwashing machine with built-in detergent, rinse-aid, and sanitizer dispensing pumps. Features 141 second total cycle, 1 Hp pump motor, fill and dump, pumped drain. Constructed of stainless steel.

1 year parts and labor warranty.

Note: Vent hood is not recommended, as unit does not produce excessive steam.

Note: Always follow local building code guidelines.

Certifications apply to the machine only.

**In the USA:**
3765 Champion Blvd, Winston-Salem, NC 27105
Tel: (336) 661-1556 Fax: (336) 661-1979
**www.championindustries.com**

**In Canada:**
2674 N. Service Rd., Jordan Station, Ontario, Canada L0R1S0
Tel: (905) 562-4195 Fax: (905) 562-4618
**www.championmoyerdiebel.ca**

Rev. 06/2026 Printed in U.S.A.

APPROVAL: _____ DATE: _____

Champion®
The Dishwashing Machine Specialists

# UL 130

## UNDERCOUNTER LOW TEMPERATURE

Dimensions shown in inches

## SPECIFICATIONS

### Capacities
| | |
|---|---|
| *Racks per hr. | 25 |

### Motor Horsepower
| | |
|---|---|
| Wash | 1 |

### Water Consumption
| | |
|---|---|
| U.S. Gal per hr. (max. use) | 32 |
| U.S. Gal. per rack | 1.6 |

### Temperature °F
| | |
|---|---|
| Wash | 120°F Min (140°F recommended) |
| Rinse | 120°F Min (140°F recommended) |

### Heating
| | |
|---|---|
| Tank heat, electric, (kW) | .75 |

### Time Cycle in seconds
| | |
|---|---|
| Wash | 90 |
| Rinse | 25 |
| Drain/fill | 27 |
| Total Cycle | 142 |

### Standard 20" x 20" Rack Complement
| | |
|---|---|
| Dish | 1 |
| Open | 1 |

*Excludes 30 second NSF load/unload time

| | Uncrated | Crated |
|---|---|---|
| Height* | 33-3/4" | 39-1/2" |
| Width | 24" | 25" |
| Depth | 25" | 25-1/2" |
| Ship Wt. LBS. | 153 | 173 |
| * Front leveling feet provided | | |

## Utilities

**1 Electrical**
115/60/1; 12-amp draw; to be fused at 15 amp. 4 ft. plug-in cord supplied.

**2 Water Connection**
120°F minimum hot water connection (140°F recommended) 6 ft. long, 1/2" I.D. flexible fill hose with 3/4" garden hose connector. Flow pressure: 25-95 psi.

**3 Pumped Drain**
5/8" I.D. flexible reinforced hose, 6 ft. long.
Max. drain flow 15 US gpm.
Max. drain height 3 ft.


*Complies with ANSI/ASSE 1440 Sections 1.4.3 & 1.4.4*

**Warning:** Plumbing, electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.

**Plumbing Notes:** Because of the variation in house-supplied steam and water pressures, steam and water pressure regulating valves (PRVs) may be needed. (Water PRV is standard on machines with booster.) The PRVs can either be purchased from Champion or obtained locally.

Champion does not endorse using on-demand (tankless) water heating systems, as well as PEX and other plumbing materials that may limit water flow, as these could impair machine performance. For optimal results, we recommend using appropriately sized conventional hot water tanks and standard copper water supply lines that adhere to our specifications. Not following these recommendations may void the manufacturer's warranty.

Water hardness of 3 grains/US Gal (0.83 Imp Gal) - 5.3 Mg/L or less

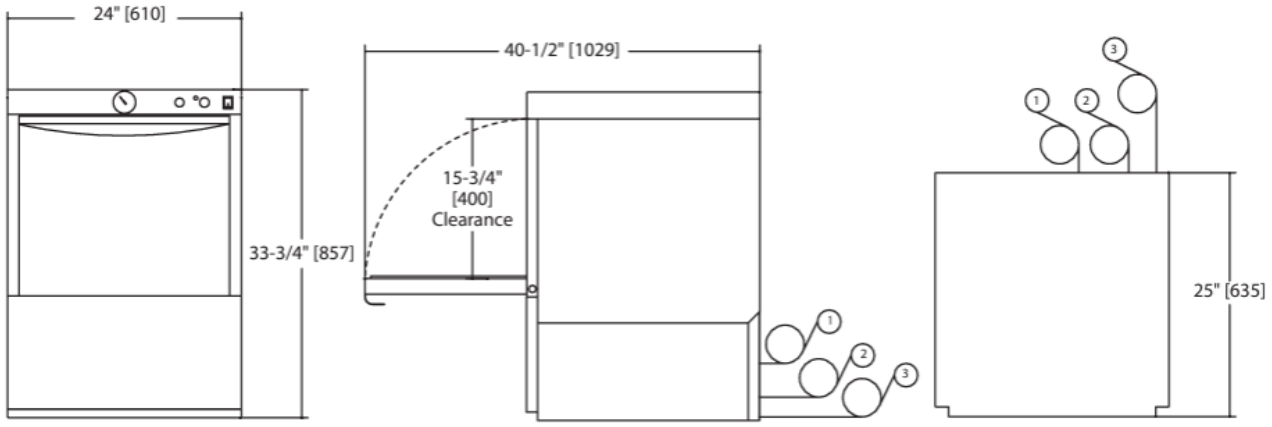


Front View | Side View | Plan View

**In the USA:** 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | **www.championindustries.com**

**In Canada:** 2674 N. Service Rd., Jordan Station, Ontario, Canada L0R1S0 | Tel: (905) 562-4195 Fax: (905) 562-4618 | **www.championmoyerdiebel.ca**

Rev. 06/2026 Printed in U.S.A.

*Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.*

WELBILT
an Ali Group Company