



# CMA-180T

High Temperature  
Pot & Pan Single Rack  
Split Door Dishwasher

**NEW  
SPLIT DOOR  
FEATURE**




**Straight Model**


**Corner Model**

## FEATURES:

- **Energy Star® Approved**
- 60 racks / 240 covers per hour.
- Economical to operate. Uses only 1.24 gallons of water per cycle.
- Split-door design provides a sheet pan door clearance of 27-inches, reduces overall (open-door) height of machine to 93-1/2". A beneficial feature for kitchens with low ceilings.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- All stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 7kW heater is proven to be more durable than commercial style heaters.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.
- Auto start/stop makes operation safe and easy.
- Field convertible for a wide range of applications.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Single point electrical connection.
- Automatic tank fill.
- Interchangeable upper and lower arms.




Industrial wash tank and optional booster heaters are designed for years of trouble free service.



Unique pull-pin design allows wash arms to be easily removed for cleaning.



Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.



External scrap tray maintains clean wash water and prevents debris from clogging the drain.



Large 27" door opening accommodates larger items.

## Available Options:

- Exhaust Fan Time Control
- Built-in 12kW booster heater
- CMA-180 Conversion Kit Corner to Straight
- CMA-180 Conversion Kit Straight to Corner
- Alternative electrical available for export
- Dual power supply connections
- Stainless steel dishtables
- 2 minute cycle
- Stainless steel scrap trap






# CMA-180T

High Temperature  
Pot & Pan Single Rack  
Split Door Dishwasher

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

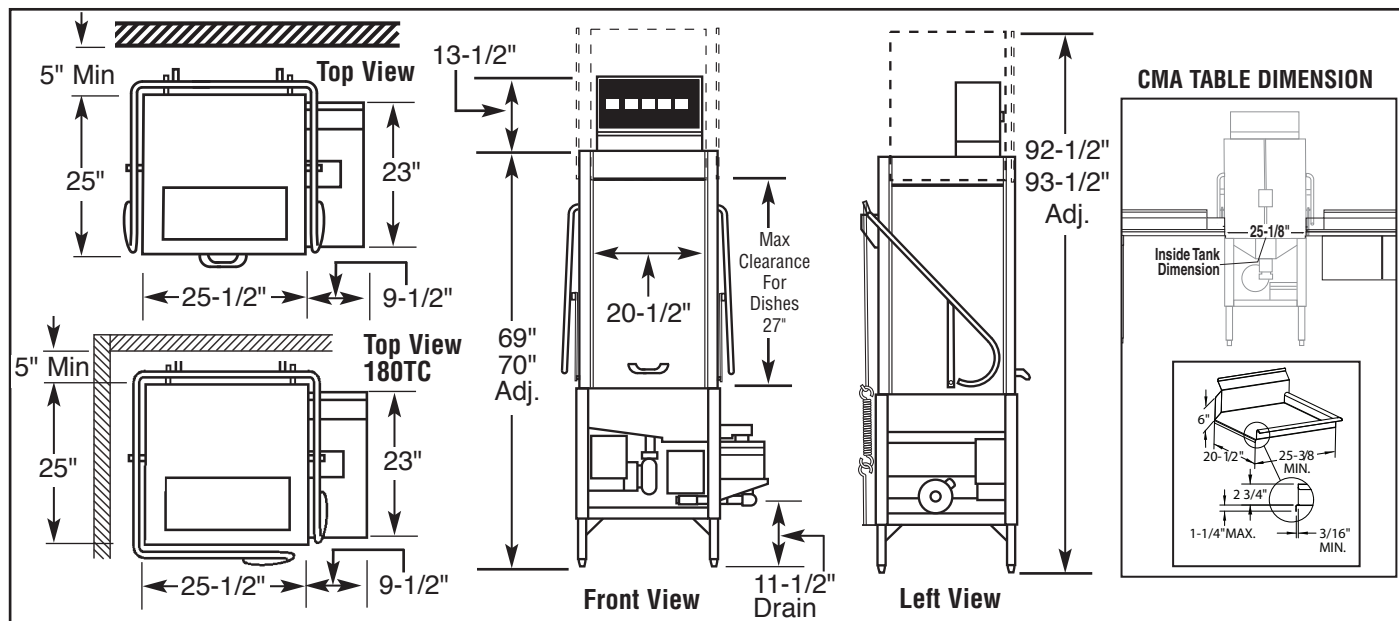

## Specifications:

MODEL CMA-180T SPLIT DOOR		USA	METRIC	USA		METRIC
<b>WATER CONSUMPTION</b>				<b>WASH PUMP MOTOR HP</b>		1
PER RACK	1.24 GAL.	(4.65 L)		<b>FRAME DIMENSIONS</b>		1
PER HOUR	74.4 GPH	(281.2 L)		DEPTH	25"	(63.5cm)
<b>OPERATING CYCLE</b>				WIDTH (OUTSIDE DIMISION)	25-1/2"	(65cm)
WASH TIME - SEC.	44	44		HEIGHT	69"-70"	(175-178cm)
RINSE TIME - SEC.	11	11		STANDARD TABLE HEIGHT	34"	(86.3cm)
TOTAL CYCLE	55	55		MAX CLEARANCE FOR DISHES	27"	(68.6cm)
<b>OPERATING CAPACITY</b>				DRAIN CONNECTION (OFF FLOOR)	11-1/2"-12-1/2"	(29-32cm)
RACKS PER HOUR	60	60		<b>STANDARD DISHRACK</b>	1	1
<b>WASH TANK CAPACITY</b>	8 GAL.	(30.3 L)		DIMENSIONS	19-3/4" X 19-3/4"	(50X50cm)
<b>PUMP CAPACITY</b>	68 GPM	(257 LPM)		<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>PHASE</b>
<b>WATER REQUIREMENTS</b>				WITHOUT BOOSTER	208	<b>AMPS</b>
WITHOUT BOOSTER HEATER	180°F	(82°C)			240	1
WITH BOOSTER HEATER	140°F	(60°C)			208	3
WATER INLET	3/4"	(1.9 cm)			240	3
DRAIN CONNECTION	2"	(5.1cm)			480	3
RINSE PRESSURE SET	20 ±5psi	(1.41 kg/cm²)		WITH BOOSTER	208	1
<b>OPERATING TEMPERATURE</b>					240	1
WASH-°F (MIN)	155°F-160°F	(68°C-71°C)			208	3
RINSE-°F (MIN)	180°F-195°F	(82°C-90°C)			240	3
					480	3
				<b>SHIPPING WEIGHT</b>		
				WITHOUT BOOSTER	353#	(160kg)
				WITH BOOSTER	396#	(180kg)

## Summary Specifications: Model CMA-180T Split Door

The model CMA-180T Split Door single tank, high temperature dishwasher is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. This machine is available with an optional "built in" booster heater, assuring a continuous supply of 180°F hot water, and can accommodate dishes and utensils up to 27" high. Constructed entirely of stainless steel. Unique soil purging system filters wash water and plate debris into an external tray. The CMA-180T Split Door meets NSF, UL, CUL and CE standards.

## Available Models

- CMA-180TS Tall Straight Split Door
- CMA-180TSB Tall Straight Split Door with booster
- CMA-180TC Tall Corner Split Door
- CMA-180TCB Tall Corner Split Door with booster



CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • [www.cmadishmachines.com](http://www.cmadishmachines.com)

CMA reserves the right to modify specifications or discontinue models without prior notification.