



MODEL E ENERGY SAVER

LOW WATER
MACHINES

USES ONLY
1.01
Gallons Of Water
Per Cycle!



MODEL E
AVAILABLE IN STRAIGHT
AND CORNER MODEL



OPTIONAL 3 DOOR
MODEL AVAILABLE
FOR STRAIGHT AND
CORNER OPERATION



MODEL E EXT
WITH 20-1/2" DOOR OPENING
AVAILABLE IN STRAIGHT
AND CORNER MODEL

FEATURES AND FACTS:

- **Energy Star Qualified.**
- 40 racks / 160 covers per hour.
- Economical to operate. **Uses only 1.01 gallons of water per cycle.**
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Top mounted controls include built-in chemical pumps and deliming system for dealing with scale.
- Auto start/stop makes operation safe and easy.
- New integrated scrap tray prevents food soil from entering drain system.
- Airgap fill system.

**CONVERTIBLE CORNER TO
STRAIGHT AND STRAIGHT TO
CORNER.**

Available Options

- Sanitizer Alarm
- Alternative cycle times
- Pull Pins
- Stainless Steel Scrap Trap Up Grade
- The "TEMP-SURE" requires a separate 208-240v 3 phase 40 amp power supply
- 3 Doors open
- Extended (Tall) version






MODEL E ENERGY SAVER

LOW WATER MACHINES

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

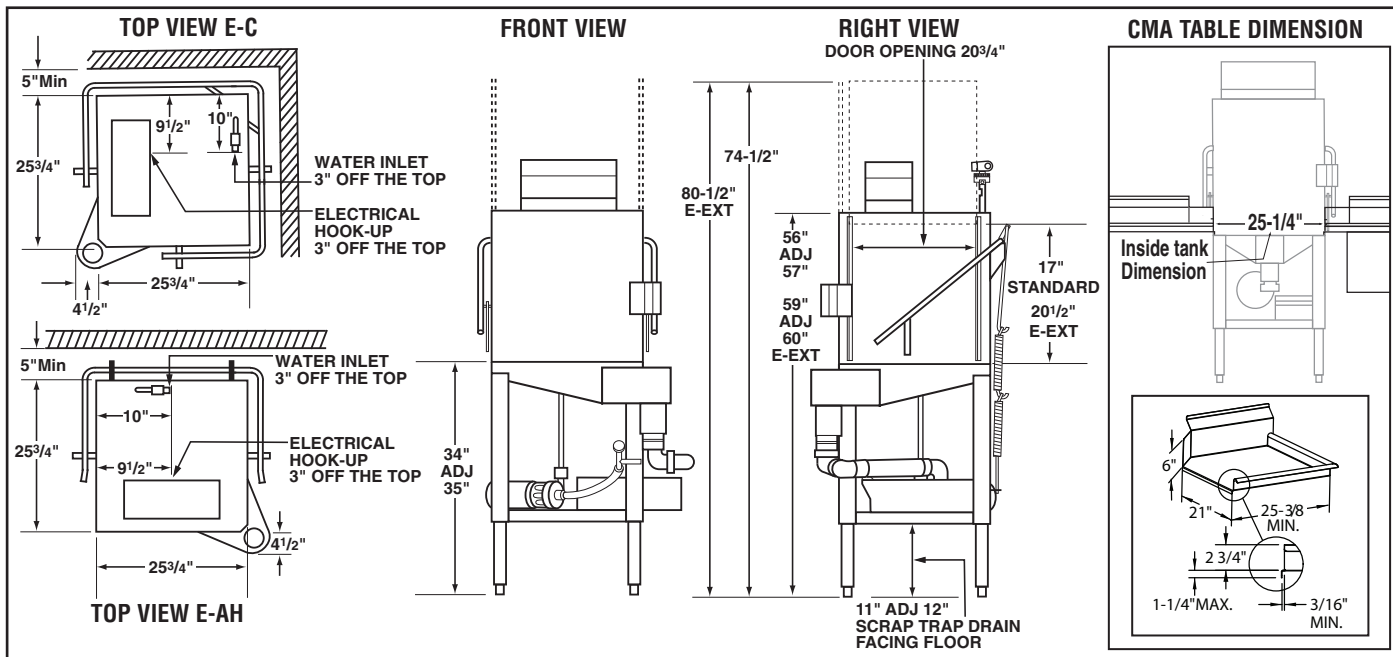

Specifications:

MODEL E/E-3/E-EXT	USA	METRIC		USA	METRIC
OPERATING CAPACITY			WASH PUMP MOTORS HP	1	1
RACKS PER HOUR (NSF RATED)	40	40	DIMENSIONS		
OPERATING CYCLE			DEPTH	25-3/4"	(65.4cm)
WASH TIME-SEC	45	45	WIDTH (OUTSIDE DIMENSION)	25-3/4"	(65.4cm)
RINSE TIME-SEC	30	30	TOTAL HEIGHT WITH DOORS OPEN	74-1/2"	(189.5cm)
DWELL TIME-SEC	15	15		E-EXT 80-1/2"	(204cm)
TOTAL CYCLE TIME	90	90	STANDARD TABLE HEIGHT	34"	(86cm)
PUMP CAPACITY	52 GPM	(197 LPM)	MAXIMUM CLEARANCE FOR DISHES	17"	(43cm)
OPERATING TEMPERATURE				E-EXT 20-1/2"	(52cm)
REQUIRED	120°F	(49°C)	STANDARD DISHRACK	1	1
RECOMMENDED	140°F	(60°C)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
WATER CONSUMPTION			ELECTRICAL RATING	VOLTS	AMPS
PER RACK	1.01 GAL.	(3.8 L)		115	16
PER HOUR	37 GPH	(140 LPH)	APPROXIMATE SHIPPING WEIGHT	E-AH/E-C 225#	(102kg)
WATER REQUIREMENTS				E-3D ???#	(???kg)
WATER INLET	1/2"	(1.27cm)		E-AH EXT/E-C EXT 262#	(118.8kg)
DRAIN-I.P.S.	2"	(5.1cm)		E-3D EXT ???#	(???kg)
			SHIPPING DIMENSIONS	PALLET & BOX @ 41" X 41" X 66" (E-AH/E-C & E-3D) EXT PALLET & BOX @ 41" X 41" X 80" (E-AH EXT/E-C EXT & E-3D EXT)	

Summary Specifications: Model E/E-3/E-EXT

CMA Energy Miser model E/E-3/E-EXT (Extended 20-1/2" door opening) low temperature, chemical sanitizing commercial dishwashers meet ETL, UL, and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model E/E-3/E-EXT is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes utensils in standard 19-3/4"x19-3/4" racks. Units come with standard upper and lower stainless steel wash arms. **Note: This machine does not have built-in heaters, therefore produces no steam.**

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

P/N: 10124.01

© 3-2018 CMA, Inc.

an All Group Company



The Spirit of Excellence