



*Energy*  
**MIZER**


**GW-100 / GL-C**  
**120V / 208/230V**

Chemical Sanitizing  
Undercounter Glasswasher



#### FEATURES:

- Cleans and sanitizes up to 1000 2-1/2" glasses per hour.
- Hands-free glass activated on/off stop is safe and convenient.
- Independent upper and lower wash and rinse arms ensure superior results.
- 120V (GW-100) with built-in 1.25kW electric tank heater maintains the recirculated wash water to the recommended 140°F wash temperature.
- 208-230V (GL-C) with built-in 3kW electric tank heater maintains the recirculated wash water to the recommended 140°F wash temperature.
- Compatible with both Iodine and Chlorine Sanitizers.
- Simple controls for operation and cleaning.
- All stainless steel construction assures trouble free service and a long life.
- Optional rinse temperature allows flexible sanitizing options.
- Poly Pro™ circular conveyor is extremely durable and reduces chipping and breakage of glassware.
- Double wall construction for quiet back bar operation.
- Internal chemical storage.
- Built-in chemical pumps with primer switches.



Stainless steel wash/rinse chamber.




Independent spray arms blast water from the top and bottom for optimum cleaning, sanitizing and rinsing.





**GW-100 / GL-C**  
**120V / 208/230V**  
Chemical Sanitizing  
Undercounter Glasswasher

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

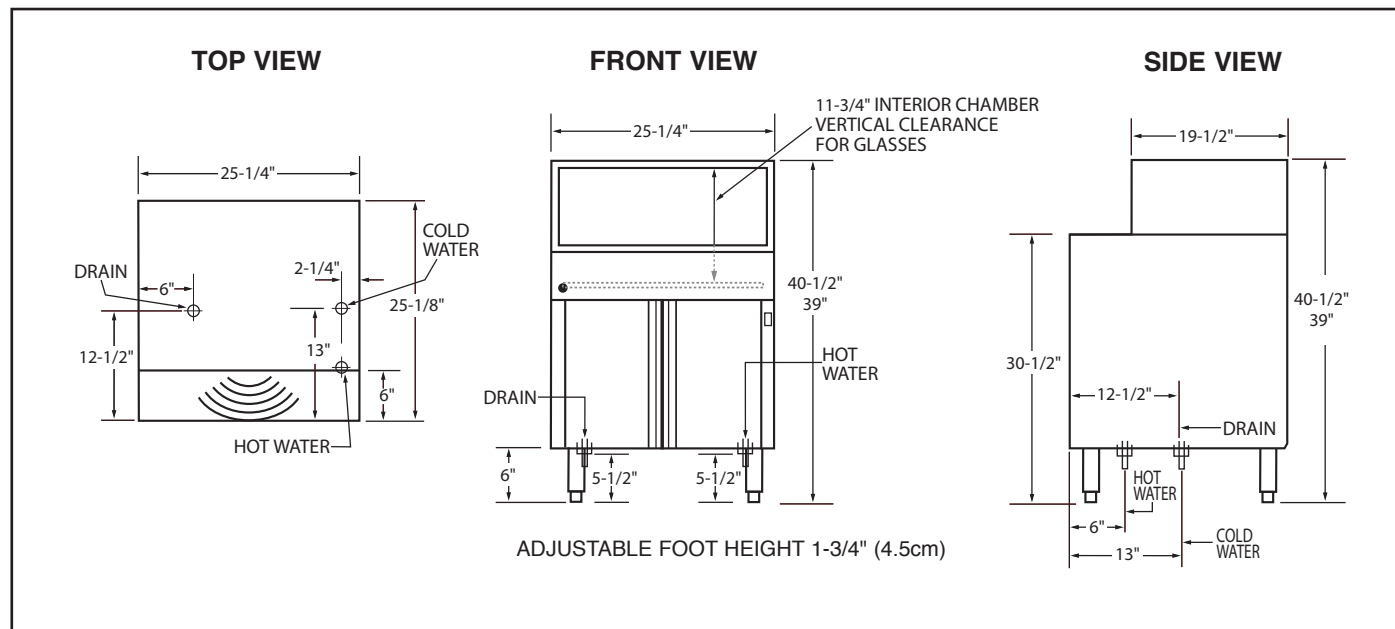

**Specifications:**

MODEL GW-100 AND MODEL GL-C	USA	METRIC		USA	METRIC
<b>OPERATING CAPACITY</b> (2-1/2") GLASSES PER HOUR	1000	1000	<b>DIMENSIONS</b>		
<b>OPERATING TEMPERATURES</b>			DEPTH	25-1/8"	(63.8cm)
INLET WATER. (HOT) RECOMMENDED	140°F	(60°C)	WIDTH	25-1/4"	(64.1cm)
INLET WATER. (COLD)	75°F	(24°C)	HEIGHT	39"-40-1/2"	(99-102.8cm)
<b>WATER CONSUMPTION</b>			MAXIMUM CLEARANCE FOR GLASSWARE	11-3/4"	(29.84cm)
HOT WATER (INITIAL FILL)	3 GAL	(11.25 L)	<b>ELECTRICAL RATING</b>		
HOT WATER PER HOUR (MAX)	12 GAL	(45.42 L)	GW-100	<b>VOLTS</b> 120/60/1	<b>AMPS</b> 11
COLD WATER PER MINUTE (APPROX)	2.8 GPM	(10.6 LPM)	GL-C	208-230/60/1	11.5-13
<b>WATER REQUIREMENTS</b>			<b>TANK HEATER - GW-100</b>		1.25kW
HOT WATER INLET	1/2"	(1.27cm)	<b>TANK HEATER - GL-C</b>		3kW
COLD WATER INLET	1/2"	(1.27cm)	<b>SHIPPING WEIGHT</b>		
DRAIN (MAX)	1-1/2"	(3.81cm)	APPROXIMATE	156#	(71kg)

**Summary Specifications: Model GW-100 (120V) and Model GL-C (208/230)**

The **GW-100** and the **GL-C** glasswashers are designed to produce sparkling clean glassware utilizing separate detergent, sanitizer and rinse aid chemical pumps. Standard features include upper and lower wash/rinse arms, wash tank heater, Poly Pro™ conveyor, splash curtains, double-walled construction, and storage space for three 1-gallon containers. The **GW-100** and the **GL-C** are constructed for extended life out of stainless steel.

