



## Chemical Sanitizing Glasswasher

### FEATURES:

- **NEW** Noise Suppression Technology (NST).
- 20 racks / 80 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble-free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Built-in chemical pumps assure proper chemical usage.
- Deliming system.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Auto fill and drain system.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- 4" legs.
- Dishmachine comes with 2 dishracks, (1) peg and (1) flat.
- Large 11" door clearance to accommodate all size glasses.

### Available Options

- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- 48" Undercounter Dishtable
- Pedestal
- 6" legs



### The New L-1C (NST) Low Temperature Glasswasher


Introducing CMA's "Noise Suppression Technology", combining sophisticated pump engineering, double wall construction, and sound deadening materials has reduced the noise output 50%, without sacrificing horse power or pump pressure. This is the ideal "behind the bar" glasswasher, providing outstanding results, economical to operate, and quiet operation. This glasswasher utilizes a recirculating wash system followed by a fresh water chemical sanitizing rinse. The "built-in" chemical dispensing system is programmable to provide precise chemical dosage per cycle.





## Chemical Sanitizing Glasswasher

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

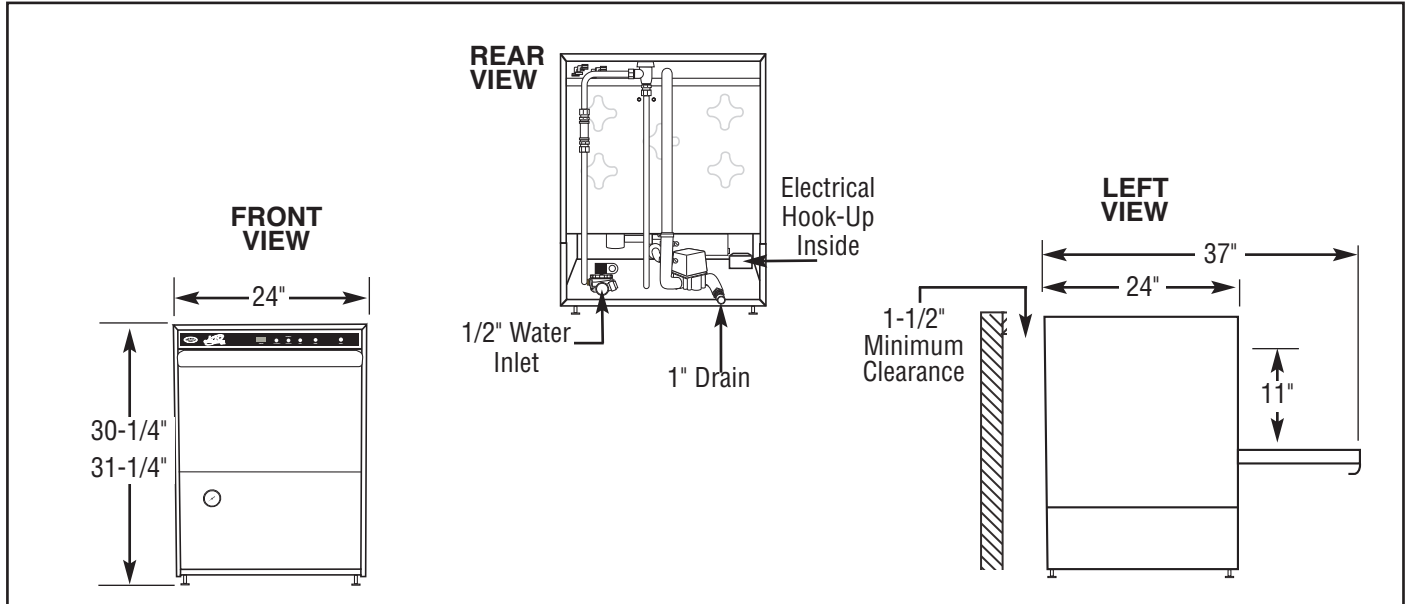

### Specifications:

| MODEL L-1C                                                 | USA      | METRIC    |                            | USA             | METRIC      |
|------------------------------------------------------------|----------|-----------|----------------------------|-----------------|-------------|
| <b>OPERATING CAPACITY</b><br>RACKS PER HOUR<br>(NSF RATED) | 20       | 20        | <b>WASH PUMP MOTORS HP</b> | 1               | 1           |
| <b>OPERATING CYCLE</b>                                     |          |           | <b>DIMENSIONS</b>          |                 |             |
| INITIAL FILL-SEC                                           | 30       | 30        | DEPTH                      | 24"             | (61cm)      |
| WASH TIME-SEC                                              | 58       | 58        | WIDTH                      | 24"             | (61cm)      |
| RINSE TIME-SEC                                             | 32       | 32        | HEIGHT                     | 30-1/4"-31-1/4" | (77-79 cm)  |
| DWELL/PURGE-SEC                                            | 30       | 30        | MAXIMUM CLEARANCE          |                 |             |
| DRAIN                                                      | 30       | 30        | HEIGHT FOR GLASSES         | 11"             | (28cm)      |
| TOTAL CYCLE TIME                                           | 3 MIN    | 3 MIN     | <b>STANDARD DISHRACK</b>   | 1               | 1           |
| WASH TANK CAPACITY                                         | 1.7 GAL. | (6.43 L)  | DIMENSIONS                 | 19-3/4"X19-3/4" | (50X50cm)   |
| WASH PUMP CAPACITY                                         | 35 GPM   | (132 LPM) | <b>ELECTRICAL RATING</b>   | <b>VOLTS</b>    | <b>AMPS</b> |
| <b>OPERATING TEMPERATURE</b>                               |          |           |                            | 115             | 11          |
| REQUIRED                                                   | 120°F    | (49°C)    | <b>SHIPPING WEIGHT</b>     |                 |             |
| RECOMMENDED                                                | 140°F    | (60°C)    | APPROXIMATE                | 196#            | (88kg)      |
| <b>WATER CONSUMPTION</b>                                   |          |           |                            |                 |             |
| PER RACK                                                   | 1.7 GAL. | (6.43 L)  |                            |                 |             |
| PER HOUR                                                   | 34 GPH   | (129 LPH) |                            |                 |             |
| WATER INLET                                                | 1/2"     | (1.27cm)  |                            |                 |             |
| DRAIN                                                      | 1"       | (2.54cm)  |                            |                 |             |

### Summary Specifications: Model L-1C

CMA model L-1C, low temperature, undercounter, chemical sanitizing, commercial glasswasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1C is constructed entirely of stainless steel. Automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. This model comes standard with upper and lower stainless steel wash arms. The L-1C incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

### New Innovative Noise Suppression Technology (NST)

