



POT & PAN

Chemical Sanitizing
Pot & Pan Single Rack
Straight/Corner Dishwasher

FEATURES:

- 40 racks / 160 covers per hour.
Models AH & C
- 80 racks / 320 covers per hour.
Model SB
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Auto start/stop makes operation safe and easy.
- Large 27" high door opening accommodates larger items and utensils.
- Integrated scrap tray prevents food soil from entering drain system.
- Stainless steel impeller offers extended life and service.
- Two dishracks included.
- Built-in strainer in water inlet to prevent water valve from clogging.

Available Options

- Solid/Powder Dual Bowl Dispenser
- CMA Temp-Sure™
(Self contained 12kW heater)
- Sanitizer Alarm
- Stainless Steel Dishtables
- Alternative Cycle Times
- Alternative Electrical Available for Export
- Stainless Steel Scrap Trap Upgrade
- Slant Shelf 27"X42"




Corner Model



AH Model



SB Model



Optional Temp-Sure™ heater assures a continuous supply of 140°F hot water that guarantees excellent results.

**CMA
MIZER®**
Registered Trademark






POT & PAN

Chemical Sanitizing
Pot & Pan Single Rack
Dishwasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

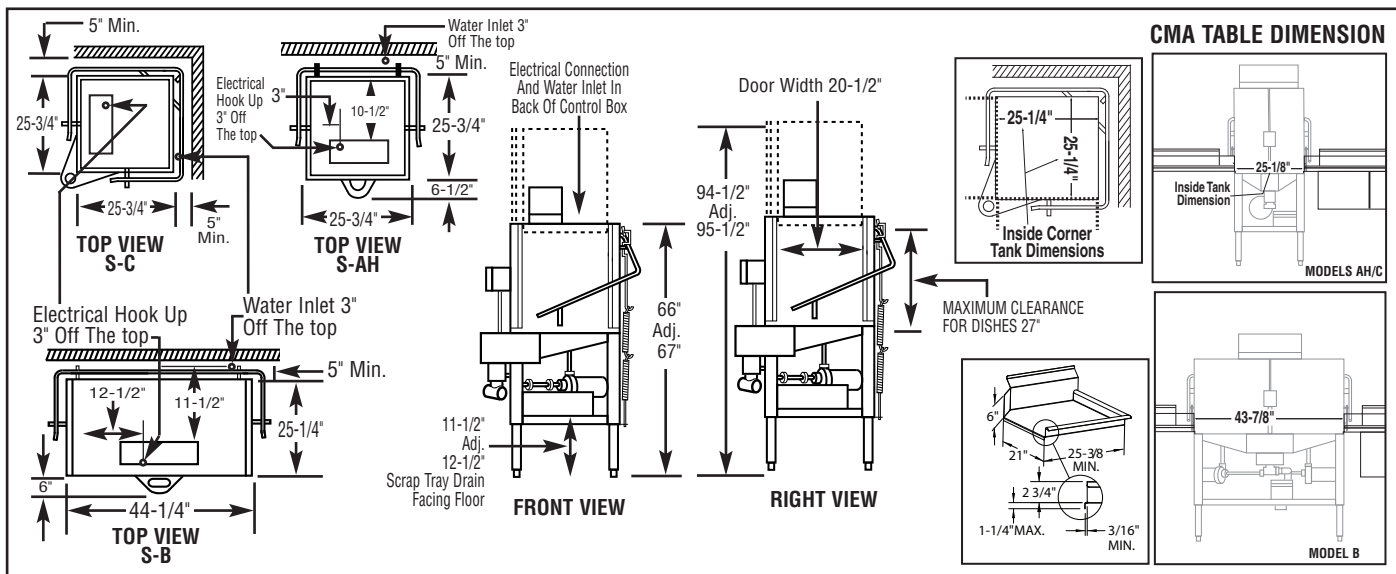

Specifications:

MODEL S	USA	METRIC		USA	METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)	40	40	WASH PUMP MOTORS HP	1	1
OPERATING CYCLE WASH TIME-SEC RINSE TIME-SEC DWELL TIME-SEC TOTAL CYCLE TIME	45 30 15 90	45 30 15 90	DIMENSIONS DEPTH DEPTH WIDTH (OUTSIDE DIMINSION) WIDTH (OUTSIDE DIMINSION) HEIGHT STANDARD TABLE HEIGHT MAXIMUM CLEARANCE FOR DISHES DRAIN CONNECTION (OFF FLOOR)	25-3/4" (AH/C) 25-1/4" (B) 25-3/4" (AH/C) 44-1/4" (B) 66"-67" 34" 27" 11-1/2" - 12-1/2"	(65.4cm) (64cm) (65.4cm) (112cm) (168-170cm) (86cm) (68.5cm) (29.2cm - 31.7cm)
WASH TANK CAPACITY	1.7 GAL. (AH/C) 3.0 GAL (B)	(6.43 L) (11.4 L)	STANDARD DISHRACK DIMENSIONS	1 19-3/4"X19-3/4"	1 (50X50cm)
PUMP CAPACITY	68 GPM (AH/C) 136 GPM (B)	(257 LPM) (514.7 LPM)	ELECTRICAL RATING	VOLTS 115 (AH/C) 115 (B)	AMPS 16 (AH/C) 30 (B)
OPERATING TEMPERATURE REQUIRED RECOMMENDED	120°F 140°F	(49°C) (60°C)	SHIPPING WEIGHT APPROXIMATE (AH/C) APPROXIMATE (B)	295# 350#	(133.8kg) (159.8kg)
WATER CONSUMPTION PER RACK PER RACK PER HOUR PER HOUR	1.7 GAL. (AH/C) 3.0 GAL (B) 74 GPH (AH/C) 118.4 GPH (B)	(6.43 L) (11.3 L) (280 LPH) (448 LPH)			
WATER REQUIREMENTS WATER INLET DRAIN-I.P.S.	3/4" 2"	(1.9cm) (5.1cm)			

Summary Specifications: Model S

CMA Energy Miser model S low temperature, chemical sanitizing commercial dishwasher meets NSF, CSA and UL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model S is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" x 19-3/4" racks and accommodates oversized plates and utensils with a 27" high door clearance. Unit comes standard with upper and lower stainless steel wash arms. The model S incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle. **Note: This machine does not have built-in heaters, therefore produces no steam.**

Available Models

- S-AH Straight
- S-C Corner
- S-B

