



**UC50e**

High Temp Undercounter  
Dishwasher And  
Glasswasher



#### FEATURES:

- **Energy Star Qualified.**
- 30 racks / 120 covers per hour.
- Fully automatic cycle for easy operation
- Built-in detergent and rinse chemical pumps.
- Pump drain allows for multiple installation applications including elevated drains.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Built-in 6 kW booster heater
- 2.7 kW wash tank heater.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Low 0.8 US gal. water usage per rack.
- Door and water level safety switches, plus booster safety thermostat.
- Stainless steel safety filters protect wash pump.
- Polished stainless steel surface and tanks with rounded corners for a total and easy cleaning.
- Operator friendly, removable wash and rinse arms allows for easy cleaning.
- Triple filtering protection system, captures excess soil and debris.



Upper and lower wash and rinse arms guarantee excellent results.



Large 13" maximum loading height door clearance accommodates oversized plates, glasses and utensils.



Built-in detergent and rinse chemical pumps.



Top mounted controls are easy to read and simple to operate.


**CMA**  
**MIZER®**  
Registered Trademark





# UC50e

High Temp Undercounter  
Dishwasher And  
Glasswasher

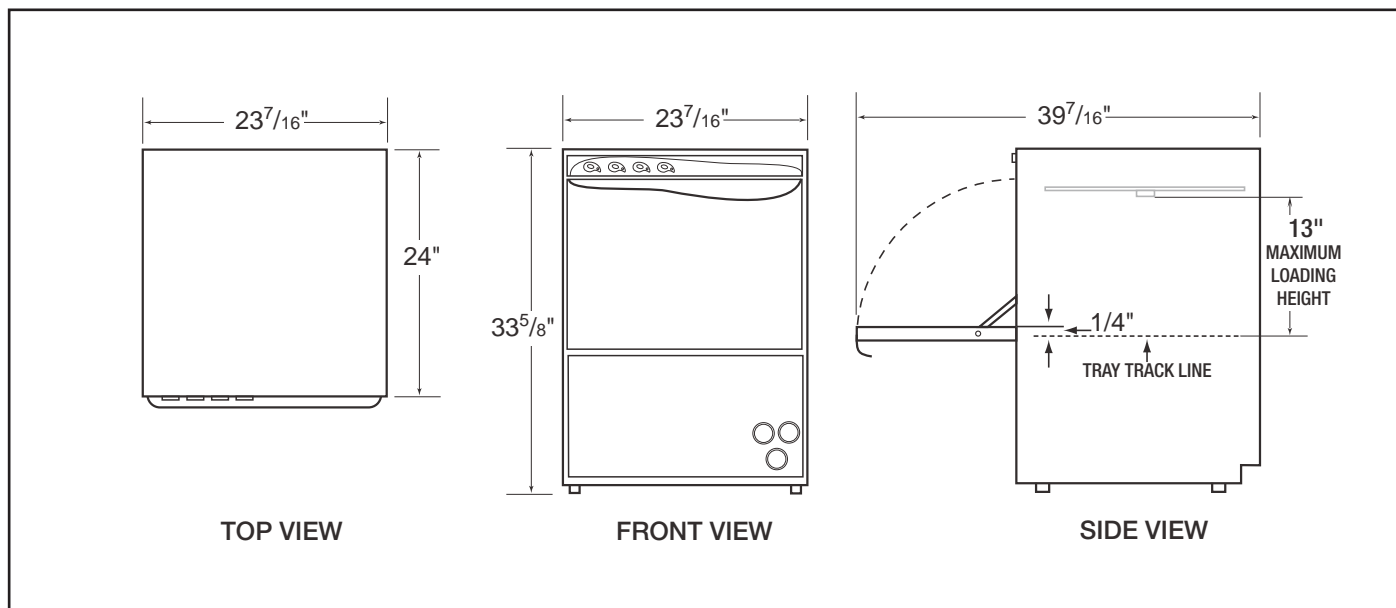

## Specifications:

MODEL UC50e	USA	METRIC		USA	METRIC
WATER CONSUMPTION			FRAME DIMENSIONS		
PER RACK	.8 GAL	(3L)	DEPTH	24"	(61 CM)
PER HOUR	24/16 GAL	(90/60L)	WIDTH	23-7/16"	(59.5 CM)
OPERATING CYCLE			HEIGHT	33-5/16"	(84.5 CM)
WASH TIME-SEC	100/160	100/160	MAXIMUM LOADING HEIGHT	13"	(33 CM)
RINSE TIME-SEC	15/15	15/15	STANDARD DISHRACK		
DWELL-SEC	5/5	5/5	DIMENSIONS	1	1
TOTAL CYCLE-SEC	120/180	120/180		19-3/4"X19-3/4"	(50X50CM)
OPERATING CAPACITY			SHIPPING WEIGHT		
RACKS PER HOUR	30/20	30/20	165# 75(KG)		
WASH TANK CAPCITY	6.87 GAL	(26L)	WASH PUMP MOTORS HP		
WATER REQUIREMENTS			3/4HP		
WATER INLET	140°F	(60°C)	HEATERS		
DRAIN CONNECTION	3/4"		WASH TEMP HEATER		
RINSE PRESSURE SET	1"		2.7kW / 2.94kW		
	24 PSI	1.7kg/cm²	BOOSTER HEATER		
			6kW / 6.53kW		
CYCLE TEMPERATURES			ELECTRICAL RATING		
WASH-°F	155°F-160°F	(68°C/71°C)	(TOTAL AMPERAGE DRAWN)	VOLTS	PHASE
RINSE-°F	180°F-195°F	(82°C/90°C)		208	1
				230	1
					28
					30

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

## Summary Specifications:

The UC50e dishwasher and glasswasher is a front loading machine designed to produce sparkling clean glasses and dishes. Constructed of double walled stainless steel skin providing constant heating and a quiet operation. Standard features include upper and lower wash/rinse arms and wash and booster tank heater. Features include 13" maximum loading height, standard liquid detergent rinse-aid dispenser.

## KROMO BRANDS

Distributed exclusively by CMA Dishmachines

