

HANDLE OPERATED COFFEE BREWER

CBS-5000 Series

CBS-52H-15

Twin 1.5 Gallon Brewer



The CBS-5000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



Handle operation — a quick start!

Simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve.



Manual water faucet.

Safely dispense hot water away from steam and brew basket.



Set it and forget it.

Program your recipe once and this brewer delivers consistent and repeatable results.

Shown with 1.5 Gallon LUXUS® Thermal Dispensers (L4D-15)

FETCO®
TRUSTED | RELIABLE | QUALITY

Water Specification

Water Inlet
3/8" male flare fitting

Minimum Flow Rate
1 1/4 gpm [4.71 lpm]

Water Pressure
20-75 psig [138-517 kPa]


Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
US & CANADA								
C52016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	10.5-15.0 [39.7-56.8] ⁽¹⁾
C52026	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	15.0-19.5 [56.8-73.8] ⁽¹⁾
C52036 ⁽²⁾	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.5-22.4	16.5-22.5 [62.5-85.2] ⁽¹⁾
C52046 ⁽²⁾	3 x 4.0 kW	120/208-240	3	4+G	9.1-12.1	Terminal Block	25.6-29.6	22.5-30.0 [85.2-113.6] ⁽¹⁾
C52186 ⁽²⁾	3 x 4.0 kW	440-480	3	3+G	10.3-12.1	Terminal Block	13.6-14.8	22.5-30.0 [85.2-113.6] ⁽¹⁾
INTERNATIONAL								
C52076 ⁽²⁾	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	19.5-22.5 [73.8-85.2] ⁽¹⁾
C52086 ⁽²⁾	3 x 4.0 kW	220-240/380-415	3	4+G	10.3-12.1	Terminal Block	15.7-17.1	25.5-30.0 [96.5-113.6] ⁽¹⁾
C52096	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Terminal Block	23.3-24.4	13.5-15.0 [51.1-56.8] ⁽¹⁾
C52106	2 x 4.0 kW	220-240	1	2+G	6.8-8.1	Terminal Block	30.9-33.8	18.0-19.5 [68.1-73.8] ⁽¹⁾

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.
(2) Requires 3 phase Electrical Power System (Z056).

Measurements

Height 36" [91.4 cm]	Width 21" [53.3 cm]	Depth 16" [40.6 cm]	Empty Weight 82 lbs [37.2 kg]	Filled Weight 145 lbs [65.8 kg]	Shipping Weight 100 lbs [45.4 kg]	Shipping Dimensions: 35" x 23" x 23" [88.9 x 58.4 x 58.4 cm]
--------------------------------	-------------------------------	-------------------------------	---	---	---	--

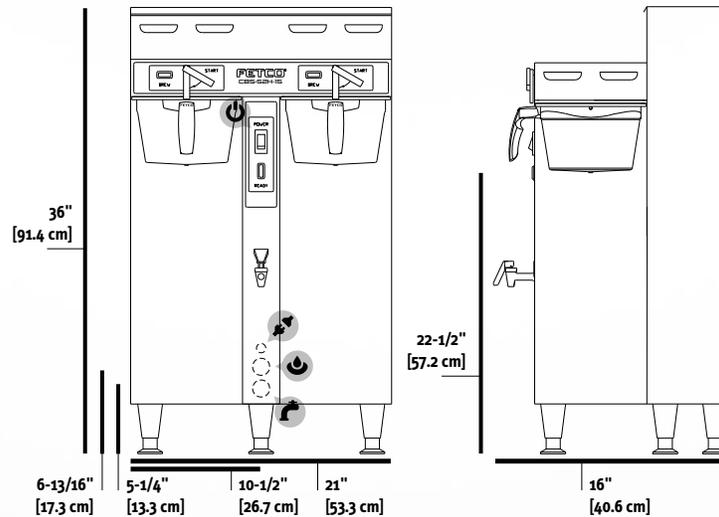

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



Compatible Dispensers

1.5 Gallon LUXUS® Thermal Server (L4S-15) Must be used with S4S Serving Stations.	D452
1.5 Gallon LUXUS® Thermal Dispenser (L4D-15)	D449
1.5 Gallon LUXUS® Portable Thermal Dispenser (TPD-15)	D009

Customize Your Brewer

Single Serving Station for L4S-15/20 Server	A150
Twin Serving Station for L4S-15/20 Server	A151
Triple Serving Station for L4S-15/20 Server	A152
Identifier Plates, Acrylic	A069
Hot Tea Infuser (1.5 Gallon Size)	A113
Drip Tray - Square	A137

Cups per Hour*

8oz. 475	12oz. 317	16oz. 238	20oz. 190
-----------	------------	------------	------------

* Approximate based on maximum power setting.

Paper Coffee Filters

15" x 5.5" (500/Case)	F001
-----------------------	------

Information

fetco.com

info@fetco.com

847.719.3000
1.800.338.2699 USA
 847.719.3001

Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA