

# HANDLE OPERATED COFFEE BREWER

## CBS-6000 Series

### CBS-61H

Single 3.0 Gallon Brewer



The CBS-6000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



#### Handle operation — a quick start!

After loading the coffee grounds, simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve — over and over again!



#### Manual water faucet.

Safely dispense hot water away from steam and brew basket.



#### Set it and forget it.

Brew directly into the ultra durable TPD-30 thermal dispensers (sold separately). Available in multiple power configurations to efficiently meet your cups-per-hour requirement and keep energy costs at a minimum.

Shown with 3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)

**FETCO**<sup>®</sup>  
TRUSTED | RELIABLE | QUALITY

## Water Specification

**Water Inlet**  
3/8" male flare fitting

**Minimum Flow Rate**  
1 gpm [3.8 lpm]

**Water Pressure**  
20-75 psig [138-517 kPa]


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
<b>US &amp; CANADA</b>								
C61016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	12.0-15.0 [45.4-56.8] <sup>(1)</sup>
C61026	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	15.0-21.0 [56.8-79.5] <sup>(1)</sup>
C61036 <sup>(2)</sup>	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.5-22.4	18.0-21.0 [68.1-79.5] <sup>(1)</sup>
C61046 <sup>(2)</sup>	3 x 4.0 kW	120/208-240	3	4+G	9.2-12.1	Terminal Block	25.6-29.6	21.0-27.0 [79.5-102.2] <sup>(1)</sup>
<b>INTERNATIONAL</b>								
C61076 <sup>(2)</sup>	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	18.0-21.0 [68.1-79.5] <sup>(1)</sup>
C61086 <sup>(2)</sup>	3 x 4.0 kW	220-240/380-415	3	4+G	10.3-12.1	Terminal Block	15.7-17.1	21.0-27.0 [79.5-102.2] <sup>(1)</sup>

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.  
 (2) Requires 3 phase Electrical Power System (Z056).

## Measurements

<b>Height</b> 39 3/4" [101.0 cm]	<b>Width</b> 21 1/2" [54.6 cm]	<b>Depth</b> 21 3/8" [54.3 cm]	<b>Empty Weight</b> 111 lbs [50.3 kg]	<b>Filled Weight</b> 177 lbs [80.3 kg]	<b>Shipping Weight</b> 115 lbs [52.2 kg]	<b>Shipping Dimensions:</b> 38" x 24" x 23" [96.5 x 61.0 x 58.4 cm]
-------------------------------------	-----------------------------------	-----------------------------------	--	---	---	--

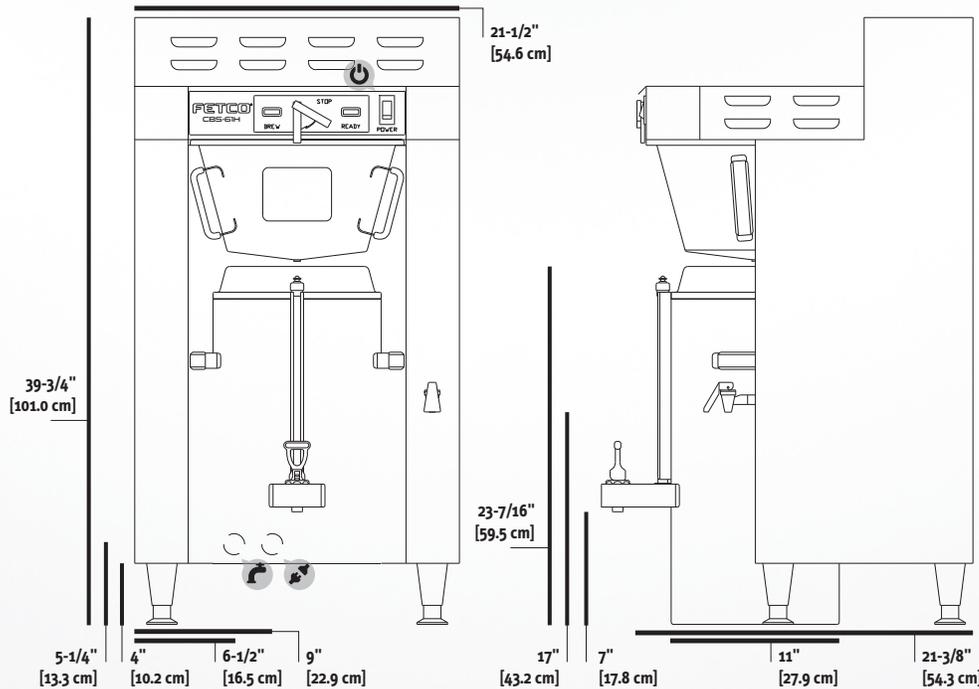

- Electrical Connector
- Water Inlet
- On / Off Switch



## Compatible Dispensers

3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)

D012

## Paper Coffee Filters

20" x 8" (500 Per Case)

F004

18" x 7" (500/Case) for Half Batch Brew Basket

F005

## Cups per Hour\*

8oz. **475** 12oz. **317** 16oz. **238** 20oz. **190**

\* Approximate based on maximum power setting.

## Information

[fetco.com](http://fetco.com)

847.719.3000  
1.800.338.2699 USA  
847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA