

Slope front ice storage bins

Model 300-22 – 22" (559 mm) wide, stores approximately 300 lbs (136 kg)

Model 425-30 – 30" (762 mm) wide, stores approximately 430 lbs (195 kg)

Model 650-44 – 44" (1118 mm) wide, stores approximately 660 lbs (299 kg)

Model 950-48 – 48" (1220 mm) wide, stores approximately 950 lbs (431 kg)

Model 1025-52 – 52" (1321 mm) wide, stores approximately 1030 lbs (467 kg)



Model 950-48 shown

Small- to medium-capacity ice storage bins for use with all major commercial ice machines*. Widths from 22" to 52" (559 to 1321 mm) and storage capacities from approximately 300 to 1000 lbs (136 to 454 kg). All models standard with stainless steel top, front and sides. All bins include stainless steel tops custom cut for specific ice machine(s) to be used and 6" (153 mm) adjustable legs.

Wide range of models to meet varied needs

- Five models to meet a wide range of space and capacity requirements
- Space-saving 22" (559 mm) wide 300-22* model provides the perfect match for Follett® Chewblet® and flake ice machines
- Space-saving 30" (762 mm) wide 425-30 model provides the perfect match for all compact ice machines
- Wider bins accommodate larger ice machines and side-by-side installation of smaller cubers and flakers

Convenient design

- Extra large door openings provide maximum access
- Extra low door sills allow users to reach the bottom of the bin
- 31.5" (801 mm) depth allows all models to fit through a 32" (813 mm) door

Quality construction features

- Stainless steel exterior standard – top, front and sides
- Heavy-duty welded steel shell and frame support
- Non-corroding polyethylene-lined walls eliminate pitting and staining
- Rigid stainless steel lift doors with non-staining ABS interior panel are insulated
- Fully replaceable gasket seals door opening

Accessories


- SmartCART™ 75 ice cart (item# 00112771)
- Partition
- Stainless steel legs (item# ABSPECLEGS)
- Stainless steel back and bottom
- San Jamar Saf-T-Ice® Guardian scoop system (item# 00146365)

* Model 300-22 only for use with Follett Maestro™ 400 (air-cooled) and Horizon™ 700 series ice machines.

** Saf-T-Ice is a registered trademark of San Jamar, a division of the Coleman Group, Inc. in the United States.

JOB: _____
ITEM: _____

Slope front ice storage bins

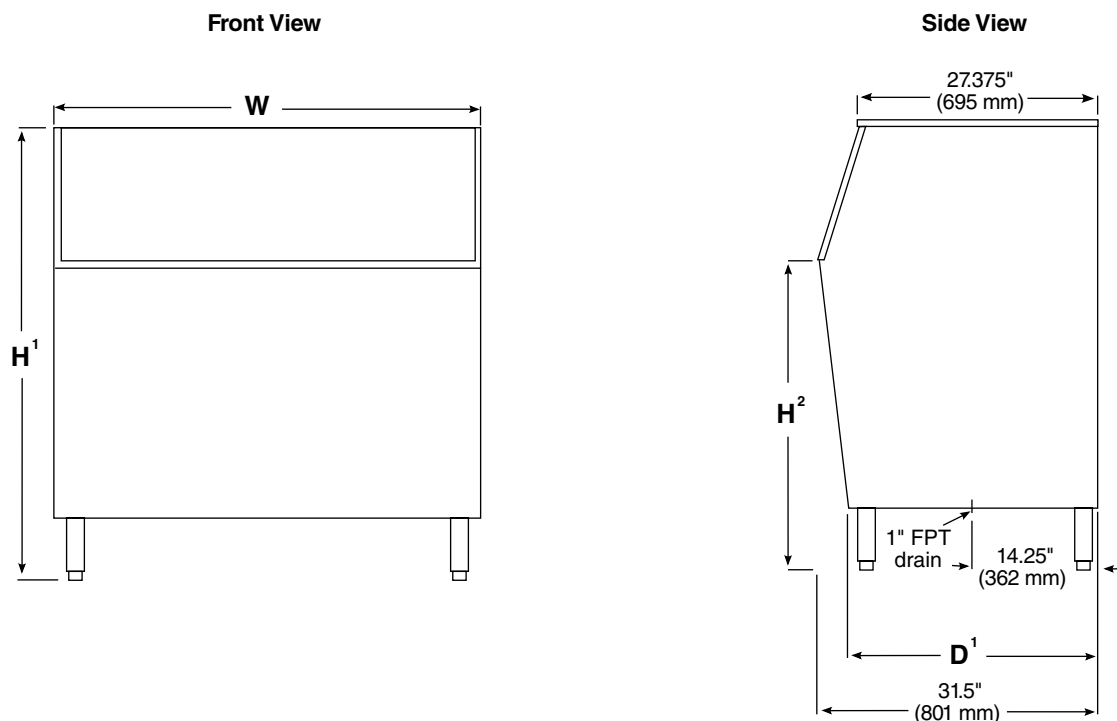

General notes

Follett recommends installation of a floor drain with grate with all ice storage bins.

| Model Number | Cubic Volume cu ft (m) | Max. Bin Cap. lb (kg) | Width in (mm) | Depth (D¹) in (mm) | Height (H¹) with Legs in (mm) | Door Sill Height (H²) in (mm) | Required Door Access in (mm) | Approx. Ship Wt. lb (kg) |
|--------------|---------------------------|--------------------------|------------------|-----------------------|-------------------------------------|-------------------------------------|------------------------------------|-----------------------------|
| 300-22* | 9.6 (0.27) | 300 (136) | 22 (559) | 29.50 (750) | 40 (1016) | 24.5 (623) | 22 (559) | 128 (58) |
| 425-30 | 13.8 (0.39) | 430 (195) | 30 (762) | 29.50 (750) | 40 (1016) | 24.5 (623) | 31 (788) | 144 (66) |
| 650-44 | 20.8 (0.59) | 660 (299) | 44 (1118) | 29.50 (750) | 40 (1016) | 24.5 (623) | 32 (813) | 178 (81) |
| 950-48 | 30.1 (0.85) | 950 (431) | 48 (1220) | 28.25 (718) | 50 (1270) | 34.5 (877) | 32 (813) | 207 (94) |
| 1025-52 | 32.6 (0.92) | 1030 (467) | 52 (1321) | 28.25 (718) | 50 (1270) | 34.5 (877) | 32 (813) | 217 (98) |

Notes:

* Model 300-22 only for use with Follett Maestro 400 (air-cooled) and Horizon 700 series ice machines.

Specifications Ice storage bin to be Follett model _____. Cubic capacity to be _____, to hold approximately _____ lbs (kg) of ice. Construction to be welded steel shell and frame. Exterior finish to be stainless steel front and sides with galvanized steel back and bottom. Bin interior to have non-corroding polyethylene-lined walls and stainless steel bottom. Bin insulation to be non-CFC polyurethane foam, bonded to shell and polyethylene-lined walls for added structural strength. Bin top to be stainless steel and to be custom cut for specific ice machines(s) to be used. Lift door to have stainless steel exterior and ABS interior, bonded together with non-CFC polyurethane foam for extra rigidity and strength. Bin to have conveniently low door sill height to allow easy access to ice in the bottom of the bin. Door opening to be completely sealed with fully replaceable gasketing. Bin to have 6" (153 mm) legs, adjustable to 6.75" (171 mm). Bin drain to be 1" FPT rigid PVC. Bin to be NSF-listed.

Horizon, Maestro and SmartCART are trademarks of Follett Corporation.
Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US.
Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.