Project Name: _		AIA#:
Model #:	Location:	
		0



### **NEW DESIGN!**

# **Gas Countertop Hot Plate**

12", 24" AND 36" MODELS

GHP12G • GHP24G (pictured) GHP36G



High performance, heavy-duty 22,000 BTU cast iron burners. 132,000 BTUs in the 36" model.

#### **Standard Features**


- Available in 12", 24", 36" widths
  - 2 burners on 12" model
  - 4 burners on 24" model
  - 6 burners on 36" model
- Extended cool-to-touch front edge
- Sleek stainless steel front plate and frame
- High performance, heavy duty 22,000 BTU cast iron burners
- Adjustable pilots with front access
- Unit ships natural gas with liquid propane gas (LP) conversion kit and regulator
- Removable, easy-to-clean, stainless steel catch trav
- Metal control knobs with set screws
- Durable, heavy-duty cast iron burner grates
- Adjustable 4" stainless steel legs


## Warranty

Two-year parts and labor

A	C MANATION LIST
	Intertek Conforms to NSF/ANSI STD. 4

Approved by:	Date:

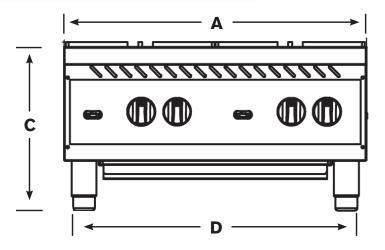

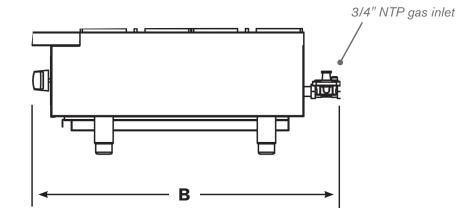

For indoor use only

### **DIMENSIONS | SPECIFICATIONS | SHIPPING INFORMATION**

Reinforced carton for shipping, weight of carton included below and may vary from shipment to shipment. Shipped on a pallet. Freight class 85.

Model	A - Width	Dimer B - Depth	sions C - Height	D - Legs Width	No. Burners BTUs ea	BTUs (Total)	Net Wt	Ship Wt
GHP12G	12" (30.5 cm)	33" (84 cm)	13.3" (34 cm)	10.5" (27 cm)	<b>2</b> 22,000	44,000	77 lbs. (35 kg)	86 lbs (39 kg)
GHP24G	24" (61 cm)	33" (84 cm)	13.3" (34 cm)	23" (58 cm)	<b>4</b> 22,000	88,000	137 lbs (62 kg)	168 lbs (76 kg)
GHP36G	36" (91 cm)	33" (84 cm)	13.3" (34 cm)	36" (91 cm)	<u>6</u> 22,000	132,000	194 lbs (88 kg)	243 lbs (110 kg)

### **GAS REQUIREMENTS AND INFORMATION**

- Natural gas or LP main supply required
- Conversion of unit from natural gas to LP must be completed by an authorized Globe servicer
- 3/4" standard pipe size I.D. connection

Gas hot plate is constructed stainless steel front plate and frame with cool-to-touch front edge. Unit has extra insulation on front and side walls, with high performance 22,000 BTU cast iron burners with adjustable pilot lights with front access. Burner grates are heavy duty cast iron, catch tray is stainless steel and removable. Gas connection is 3/4" N.P.T. males and a convertible pressure regulator is provided for either LP or natural gas. Hot plate is listed to NSF Standard 4 by ETL. 2 year parts and labor warranty.