| | Project Name: | | AIA#: | |
|--------|---------------|-----------|-------|--|
| del #: | | Location: | | |

Quantity: _

Cilobe

The Perfect Mix of Performance and Value

Item #:

25 Quart **Planetary Bench Mixer**

Model SP25

Standard Features

- Powerful 3/4 HP custom built motor
- Gear-driven, high-torque transmission
- Heat-treated hardened steel alloy gears and shafts
- Three fixed speeds
- Permanently lubricated transmission
- Thermal overload protection
- Front-mounted touch pad controls with 60-minute digital timer and last-batch recall
- Removable stainless steel, interlocking bowl guard with built-in fully welded ingredient chute
- Interlocked bowl lift
- Rigid cast iron body
- Industry standard #12 attachment hub
- NSF approved enamel gray paint
- 6-foot cord and ground plug

Standard Accessories/Attachments

- 25 qt (#304 series) stainless steel bowl
- Aluminum flat beater
- Stainless steel wire whip
- Aluminum spiral dough hook
- Non-slip rubber feet

Warrantv

Two-year parts and one-year labor

Optional Accessories

Slicer/shredder/grater for #12 hub


Features front mounted touch pad control panel with 60-minute digital timer!

- Meat grinder for #12 hub
- Stainless steel flat beater
- Stainless steel spiral dough hook
- 10 qt adapter kit
- Mixer table with undershelf
- Extended warranty

To select options, see complete list on back

| Approved by: _ | Date: | | |
|----------------|-------|--|--|
| ,, , – | | | |

08-2015

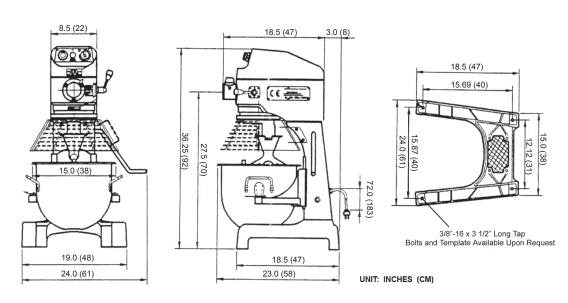

Drawings available through KCL at www.kclcad.com.

| SPECIFICATIONS | | | | | | | | | | | | |
|----------------|--------|----------|------|----------------------|-------------------|--|----------------|------------------|------------|----------|-------------------|------------|
| Model | Motor | Volts | Amps | Transmission Type | Capacity | Controls | Agitato 1st | or Speeds 2nd | (RPMs) 3rd | Attachme | ent Speeds 2nd | (RPMs) 3rd |
| SP25 | 3/4 HP | 115/60/1 | 11 | Gear | 25 qt 24 liter | Front-mounted digital controls & timer | 101 | 185 | 355 | 57 | 105 | 202 |

Cord & Plug: Attached 6-foot flexible 3-wire cord with molded plug fits a grounded receptacle. NEMA 5-15P (1.)

DIMENSIONS | SHIPPING INFORMATION

Cartons are reinforced for shipping. The weight and dimensions of this reinforced carton are included below and may vary from shipment to shipment. This product ships on a pallet. Freight class 85.

| Model | Base Foot Print | Overall Dimensions | Net Weight | Shipping Dimensions | Shipping Weight |
|-------|------------------|--------------------------|------------|---------------------------|-----------------|
| SP25 | 19" w x 18.45" d | 24" w x 23" d x 36.25" h | 264 lbs | 32" w x 40" d x 49" h | 325 lbs |
| | (48 cm x 47 cm) | (61 cm x 58 cm x 92 cm) | (120 kg) | (81 cm x 102 cm x 125 cm) | (147 kg) |

Mixer is constructed of a rigid cast iron body with front-mounted touchpad controls and a digital 60-minute timer with last-batch recall. Mixer has a 3/4 HP custom built motor with overload protection and gear-driven, high torque permanently lubricated transmission consisting of heat-treated hardened steel alloy gears and shafts. Mixer comes standard with 25 qt. stainless steel bowl, aluminum flat beater, stainless steel wire whip, and aluminum dough hook and non-slip rubber feet. Interlocked, removable stainless steel bowl guard with fully welded on ingredient chute. Mixer has #12 attachment hub and interlocked bowl lift. Mixer is NSF and ETL listed. Two year parts and one-year labor warranty.

OPTIONAL MIXER ACCESSORIES AND HUB ATTACHMENTS

| OF HONAL WINER ACCESSORIES AND HOD ATTACHMENTS | | | | | | | |
|--|--|---|--|--|--|--|--|
| HUB: | ☐ XMCA-SS Meat grinder sssembly | ☐ CP16-12 5/8" (16 mm) | | | | | |
| ☐ XVSGH 9" Slicer/Shredder/Grater | (Polished stainless steel cylinder, worm | ☐ CP18-12 11/16" (18 mm) | | | | | |
| housing only (no plates included-must | gear, ring, and s/s pan, Includes knife. | CP00-12 Stuffing plate | | | | | |
| | | _ | | | | | |
| ☐ XASP Adjustable slicing plate | ☐ XXCK Chopper knife for XMCA-SS | ☐ XST12 1/2" Stuffing tube (mutton) | | | | | |
| (for vegetables only) | • • | ☐ XST34 3/4" Stuffing tube (pork) | | | | | |
| ☐ XPH Plate holder -*only 1 required | ☐ CP02-12 1/16" (2 mm) | ☐ FACTORY INSTALLED OPTION: | | | | | |
| Shredding Plates: | ☐ CP04-12 5/32" (4 mm) | XXCORR-25 Correctional package, | | | | | |
| ☐ XSP332* 3/32" (2.3 mm) | ☐ CP05-12 3/16" (5 mm) | includes tamper resistant external | | | | | |
| ☐ XSP316* 3/16" (4.7 mm) | ☐ CP06-12 1/4" (6 mm) | fasteners. | | | | | |
| ☐ XSP14* 1/4" (6.3 mm) | ☐ CP08-12 5/16" (8 mm) | ☐ EXTENDED WARRANTY | | | | | |
| ☐ XSP516* 5/16" (7.9 mm) | ☐ CP10-12 3/8" (10 mm) | SP-XD2530 Extended warranty for | | | | | |
| ☐ XSP12* 1/2" (12.7 mm) | ☐ CP12-12 1/2" (12 mm) | SP25 mixer, extends factory warranty | | | | | |
| ☐ XGP* Grating plate | ☐ CP14-12 9/16" (14 mm) | to 2 years. Available only at time of purchase. | | | | | |
| | HUB: XVSGH 9" Slicer/Shredder/Grater housing only (no plates included-must select from plates listed on this sheet) XASP Adjustable slicing plate (for vegetables only) XPH Plate holder -*only 1 required Shredding Plates: XSP332* 3/32" (2.3 mm) XSP316* 3/16" (4.7 mm) XSP14* 1/4" (6.3 mm) XSP516* 5/16" (7.9 mm) XSP12* 1/2" (12.7 mm) | HUB: □ XVSGH 9" Slicer/Shredder/Grater housing only (no plates included-must select from plates listed on this sheet) □ XASP Adjustable slicing plate (for vegetables only) □ XPH Plate holder -*only 1 required Shredding Plates: □ XSP32* 3/32" (2.3 mm) □ XSP336* 3/16" (4.7 mm) □ XSP14* 1/4" (6.3 mm) □ XSP156* 5/16" (7.9 mm) □ XSP12* 1/2" (12.7 mm) □ XMCA-SS Meat grinder sssembly (Polished stainless steel cylinder, worm gear, ring, and s/s pan. Includes knife, 3/16" plate, and pusher.) □ XXCK Chopper knife for XMCA-SS Chopper Plate Sizes Available: □ CP02-12 1/16" (2 mm) □ CP05-12 3/16" (5 mm) □ CP06-12 1/4" (6 mm) □ CP08-12 5/16" (8 mm) □ CP10-12 3/8" (10 mm) □ CP12-12 1/2" (12 mm) | | | | | |