



C-80BAK-(AD)DS

Self-Contained Cubelet Ice Machine
with Built-In Storage Bin



C-80BAK-(AD)DS
03/21/25
Item # 13229K

W x D x H

C-80BAK / C-80BAK-DS

14^{7/8}" x 22^{5/8}" x 33^{1/2}"

Shipping Dimensions 20^{3/4}" x 30^{1/2}" x 40"

C-80BAK-AD / C-80BAK-ADDS

14^{7/8}" x 22^{5/8}" x 31^{1/2}"

Shipping Dimensions 20^{3/4}" x 30^{1/2}" x 38"

* not including handle



★ **C-80BAK**
Air-Cooled
(Shown)

★ **C-80BAK-AD**
Air-Cooled
ADA Compliant Unit



★ **C-80BAK-DS***
with Custom Cabinetry
(Shown)

★ **C-80BAK-ADDS***
Air-Cooled
ADA Compliant Unit

*Customer responsible for providing cabinetry



Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

- ▶ Full length stainless steel door handle
- ▶ UL approved for outdoor use
- ▶ Undercounter design
- ▶ Environmentally friendly R290 hydrocarbon refrigerant
- ▶ Energy Star Qualified

- Up to 92 lbs. of ice production per 24 hours
- Up to 27 lbs. of built-in storage capacity
- Power switch accessible without panel removal
- Less than 34 inches tall (C-80BAK, C-80BAK-DS)
- Less than 32 inches tall; ADA Compliant (C-80BAK-AD, C-80BAK-ADDS)
- Easily disassembled water circuit for easy cleaning
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug


Warranty:

2 Year Parts & Labor on entire machine.
1 Year Parts & Labor on HS-5061 Drain Pump Assembly.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

		ICE PRODUCTION		WATER USAGE		ELECTRICAL							
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F		Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)	
	Air	C-80BAK(-DS) [★]	92	65	12.0	N/A	8.5	15A	2.8A	115V/60/1	1,400	1.9 oz	125/134
	Air	C-80BAK-AD(-DS) [★]	92	65	12.0	N/A	8.5	15A	2.8A	115V/60/1	1,400	1.9 oz	125/134

Power cord included

Mini Cubelet Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Allow enough clearance at rear for water and drain connections with 15" (38 cm) clearance in the front.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

Parts

- Optional Side Trim Kit: HS-0182
- Optional Drain Pump Assembly: HS-5061
- Water filter: H9320-51

Plumbing

- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent

Water Filter

Please refer to water filter spec sheet for recommended configurations.

Hoshizaki reserves the right to change specifications without notice.




C-80BAK-(AD)DS

Self-Contained Cubelet Ice Machine
with Built-In Storage Bin




C-80BAK-(AD)DS
03/21/25
Item # 13229K

FRONT VIEW

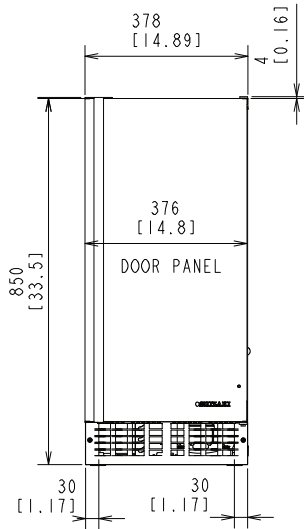


C-80BAK*

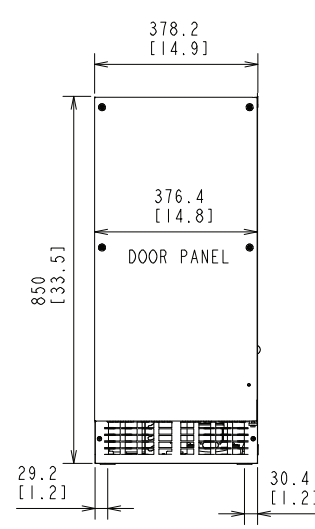

C-80BAK-DS*

* -AD models have height of 31.5"


REAR VIEW

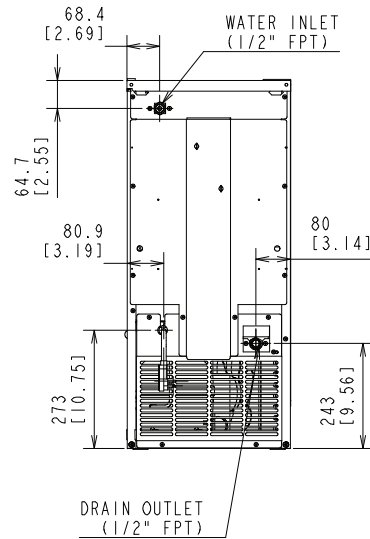

C-80BAK-(DS)*

* -AD models have height of 31.5"


SIDE VIEW

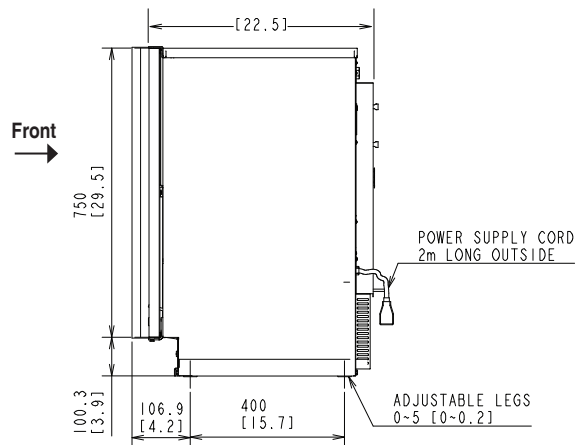

C-80BAK*

* -AD models have height of 31.5"

TOP VIEW

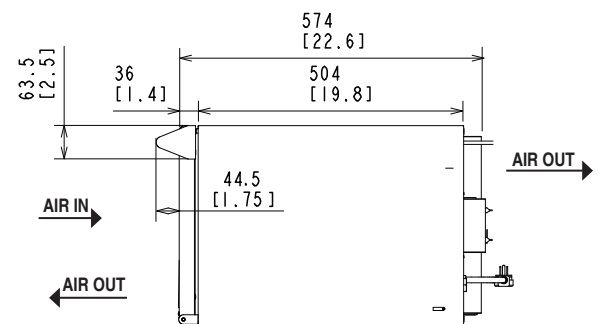

C-80BAK*