F-1530M_K2(Z)(-C)(-SC)

Modular Ice Machine
Slim-Line Series

F-1530M_K2(Z)(-C)(-SC)
09/18/26
Item # 13339K

Item #: _____

Project: _____

Qty: _____

AIA#: _____

W x D x H
30" x 27 3/8" x 34 5/8"

F-1530MAK2
Air-Cooled Flaker
Shown on optional bin B-900

F-1530MWK2
Water-Cooled Flaker

F-1530MRKZ2
Remote Air-Cooled Flaker

F-1530MAK2-C
Air-Cooled Cubelet

F-1530MWK2-C
Water-Cooled Cubelet

F-1530MRKZ2-C
Remote Air-Cooled Cubelet

F-1530MAK2-SC
Air-Cooled Cubelet

F-1530MWK2-SC
Water-Cooled Cubelet

F-1530MRKZ2-SC
Remote Air-Cooled Cubelet



Features

- **Durable stainless steel exterior**
- **R448 Refrigerant**
- **Advanced CleanCycle24™ design**
- **Stainless steel auger with greaseless bearing**

- Flaker - Up to 1734 lbs. of ice production per 24 hrs.
- Cubelet - Up to 1543 lbs. of ice production per 24 hrs.
- Mount two units, side-by-side, in only 60" of floor space for double the amount of ice production
- 2 second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Ultrasonic bin control for easy cleaning and reliability

Available on Bins:

B-250SF	B-700SF	B-900SF	B-1300SS	B-1650SS
B-500SF	B-800SF	B-1150SS	B-1500SS	

Top kit may be required. See Bin Spec Sheets.

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 34.75" x 32" x 40" Volume: 24.82ft³

NMFC_LTL Class: MWK: 123550-02_150, MAK/MRK: 123550-03_92.5

Ice machines must be hard-wired at site.

Condenser	Model	ICE PRODUCTION Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	WATER USAGE Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	ELECTRICAL kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	F-1530MAK2	1734	1340	12.0	N/A	4.12	20A	13.1A	208-230/60/1	4	15,000	44.1 oz.	310 / 345
Water	F-1530MWK2	1622	1360	12.0	115	3.15	20A	10.6A	208-230/60/1	4	12,700	17.6 oz.	310 / 345
Remote	F-1530MRKZ2	1560	1290	12.0	N/A	3.95	20A	13.4A	208-230/60/1	4	11,500	128 oz. 199.3 oz. †	310 / 345
Air	F-1530MAK2-C	1543	1260	12.0	N/A	4.60	20A	13.1A	208-230/60/1	4	15,000	44.1 oz.	310 / 345
Water	F-1530MWK2-C	1420	1260	12.0	130	3.70	20A	10.6A	208-230/60/1	4	12,700	17.6 oz.	310 / 345
Remote	F-1530MRKZ2-C	1375	1160	12.0	N/A	4.45	20A	13.4A	208-230/60/1	4	11,500	128 oz. 199.3 oz. †	310 / 345
Air	F-1530MAK2-SC	1649	1280	12.0	N/A	4.4	20A	13.1A	208-230/60/1	4	15,000	44.1 oz.	310 / 345
Water	F-1530MWK2-SC	1551	1300	12.0	130	3.39	20A	10.6A	208-230/60/1	4	12,700	17.6 oz.	310 / 345
Remote	F-1530MRKZ2-SC	1460	1215	12.0	N/A	4.15	20A	13.4A	208-230/60/1	4	11,500	128 oz. 199.3 oz. †	310 / 345


†(with condenser)

Cube Dimensions*


Flaked F-1501M_K2(Z)



Cubelet F-1501M_K2(Z)-C



Soft Cubelet F-1501M_K2(Z)-SC



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187-253V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed- all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear and sides, and 24" (61 cm) clearance at top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.


F-1530M_K2(Z)(-C)(-SC)

Modular Ice Machine
Slim-Line Series


F-1530M_K2(Z)(-C)(-SC)
09/18/26
Item # 13339K

mm
[inch]


FRONT VIEW

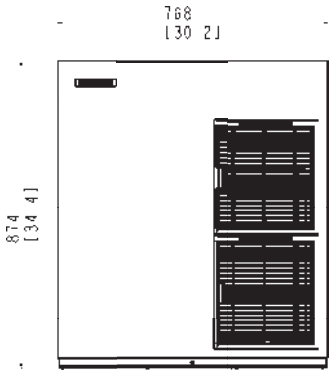

AIR-COOLED

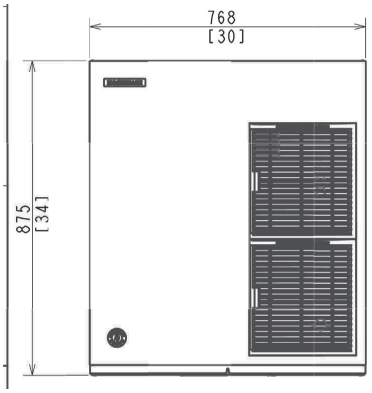


WATER-COOLED

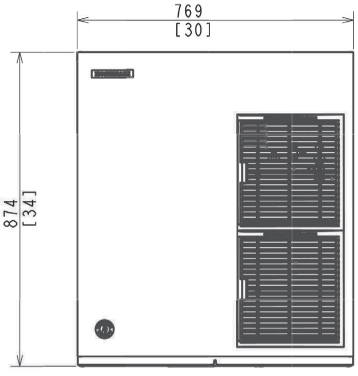


REMOTE AIR-COOLED


SIDE VIEW

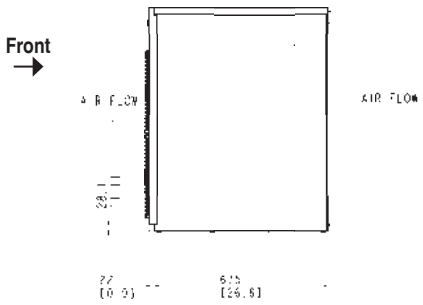

AIR-COOLED




WATER-COOLED

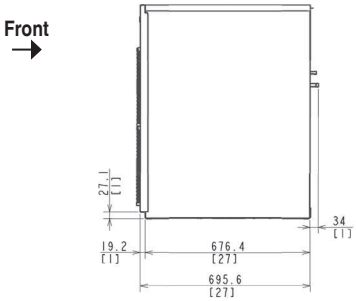


REMOTE AIR-COOLED


REAR VIEW

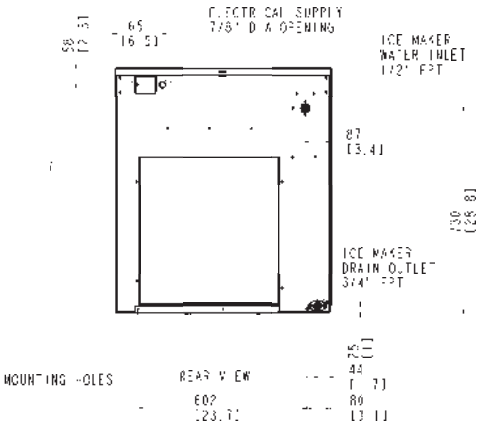

AIR-COOLED

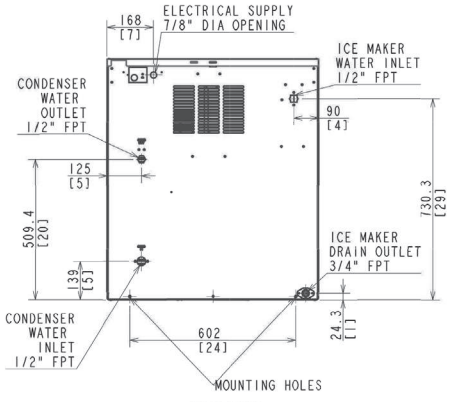


WATER-COOLED

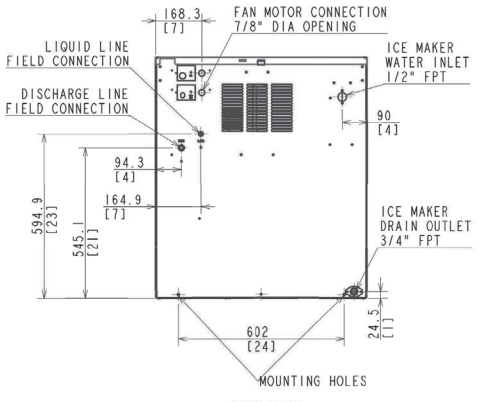


REMOTE AIR-COOLED

BOTTOM VIEW

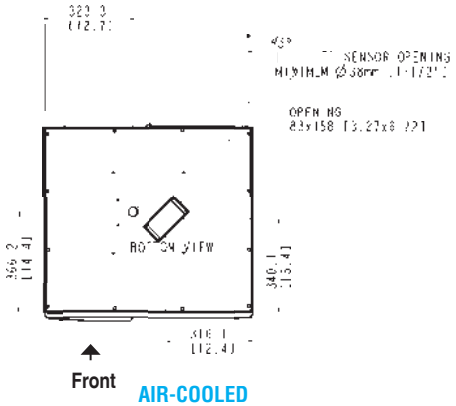

AIR-COOLED

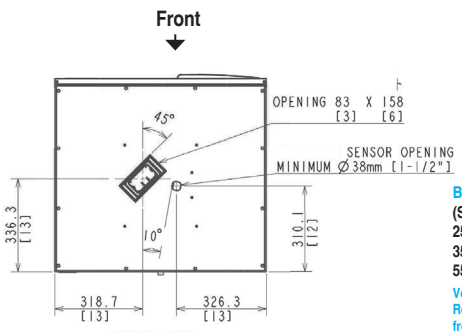


WATER-COOLED
REMOTE AIR-COOLED

Brazed Line Sets
(Sold Separately)
25' HS-5604
35' HS-5605
55' HS-5606

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No addtional circuit is required.

URC-14KZ Remote Condenser (Sold Separately)
(W x D x H) 35 11/16 x 14 1/16 x 36 1/2
For Use with F-1530MRKZ2(-C)(-SC)

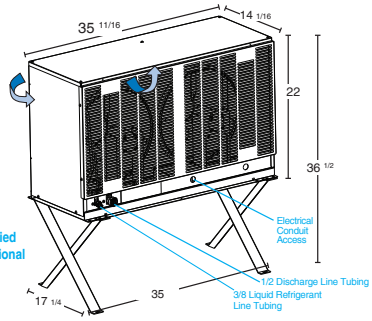

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com