



KM-231BAK

SELF-CONTAINED CUBER
WITH BUILT-IN STORAGE BIN

KMEDGE™



KM-231BAK
10/28/25
Item # 13555K

W x D x H
24" x 28" x 39"*

*including 6" legs



ADA Compliant

KM-231BAK
Air-Cooled
Shown



Features

► Individual crescent cube

► Environmentally friendly R290
hydrocarbon refrigerant

► Stainless steel evaporator

- CycleSaver™ design 
- Up to 223 lbs. of ice production per 24 hours
- Built-in storage capacity of 2.7ft³/80 lbs.*
- Durable stainless steel exterior
- Front-in, front-out airflow
- Removable air filter (Air-cooled model only)
- Ice bin opening is ADA compliant
- 6.5ft.(2000 mm) power cord with NEMA 5-15P plug
- EverCheck™ alert system 


Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.
5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for
warranty in other countries.

Shipping: (LxWxH) 34" x 33" X 39" Volume: 25.32ft³

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL			Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage			
Air-Cooled	KM-231BAK	223 163	34.0	N/A	6.2	15A	5.2A	115V/60/1	3,400	4.1 oz.	137 / 165

KMEdge™ Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 108 - 122V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Allow enough space at rear for water supply and drain connections. Allow at least 2" (5 cm) on right side for proper air circulation and at least 0.6" (15 mm) clearance at top for service/maintenance.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water Filter

Please refer to water filter spec sheet for recommended configurations.

Hoshizaki reserves the right to change specifications without notice.




KM-231BAK

**SELF-CONTAINED CUBER
WITH BUILT-IN STORAGE BIN**


KM|EDGE™

KM-231BAK
10/28/25
Item # 13555K


FRONT VIEW

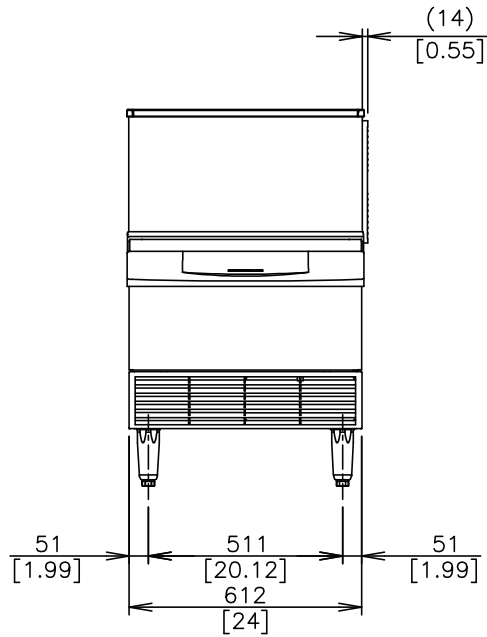

SIDE VIEW

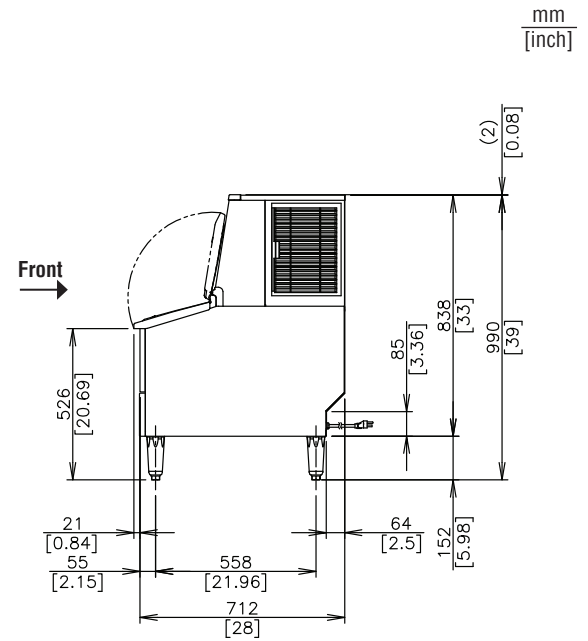

REAR VIEW

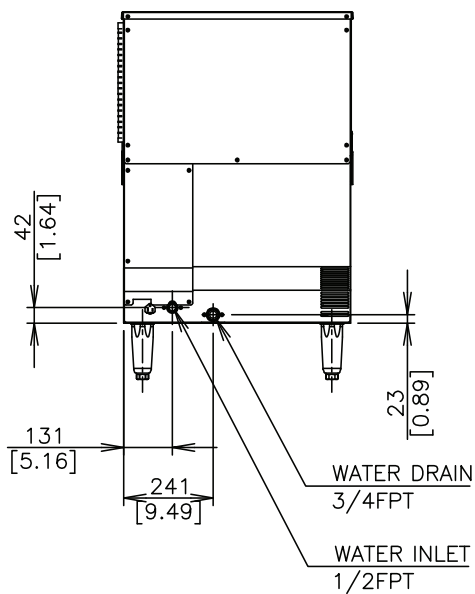

TOP VIEW

