iceValet®

HD22 - 22" Hotel Dispenser

iceValet® Hotel Dispenser

Features

- Stores up to 120 lb. of cube ice.
- Simple push chute for easy ice dispensing.
- Modern, stylish design in a corrosion resistant metallic cabinet.
- Removable top panel allows access to the bin for easy cleaning without having to remove the ice machine.
- Improved sink depth that will accommodate almost every size hotel ice bucket.
- Equipped with an 11 ft. power cord.
- Match the iceValet[®] dispenser with a Scotsman Prodigy Plus[®] ice machine featuring self-monitoring technology, cost-saving energy efficiency, extended time between cleanings, easy-access servicing and built-in anti-microbial protection. All of these features add up to the smartest choice in ice.

Easy Push Chute







HD22

Application Bin Capacity

120/59 lb/kg



Matching Ice Machine Options

			24 Hr Ice Production 70°F/21°C Air 90°F/32°C		
Model Number	Cube Size	Condenser Type	50°F/10°C lb/kg	Water	70°F/21°C lb/kg
C0322MA	Medium	Air	356/162		232/105
C0322MW	Medium	Water	366/166		292/133
C0322SA	Small	Air	356/162		232/105
C0322SW	Small	Water	366/166		292/133
C0522MA	Medium	Air	475/216		340/154
C0522MW	Medium	Water	549/250		409/186
C0522SA	Small	Air	475/216		340/154
C0522SW	Small	Water	549/250		409/186



Polyurethane Insulation

Foam insulation is forced between the wall and liner under heat and pressure to form a perfect wall to wall bond, preserving ice supply for long periods.



Certification















- 3 years parts and labor on all components.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.

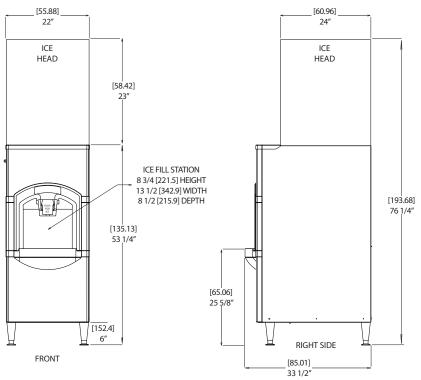




C0322 on HD22 hotel dispenser.

Specifications

	Model Number	Actuation	Application Bin Capacity lb/kg	Electrical	Circuit Wires	Min. Circuit Ampacity	Max. Fuse Size or HACR Circuit Breaker (amps)
Į	HD22B-1	Push	120/59	115/60/1	2	Cord	15





Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

an Ali Group Company

The Spirit of Excellence





- 1-800-SCOTSMAN Fax: 847-913-9844
- www.scotsman-ice.com customer.relations@scotsman-ice.com