iceValet®

HD30 - 30" Hotel Dispenser

Features

- Stores up to 180 lb. of cube ice.
- · Simple push chute for easy ice dispensing.
- Modern, stylish design in a corrosion resistant metallic cabinet.
- Removable top panel allows access to the bin for easy cleaning without having to remove the ice machine.
- · Improved sink depth that will accommodate almost every size hotel ice bucket.
- Equipped with an 11 ft. power cord.
- Match the iceValet® dispenser with a Scotsman Prodigy Plus® ice machine featuring self-monitoring technology, cost-saving energy efficiency, extended time between cleanings, easy-access servicing and built-in anti-microbial protection. All of these features add up to the smartest choice in ice.

Easy Push Chute







Н	D30

Application Bin Capacity

180/81



Matching Ice Machine Options

			24 III ICC I TOUGCHOIT		
Model Number	Cube Size	Condenser Type	70°F/21°C 50°F/10°C lb/kg	Air Water	90°F/32°C 70°F/21°C lb/kg
C0330MA	Medium	Air	350/159		288/131
C0330MW	Medium	Water	400/182		326/148
C0330SA	Small	Air	350/159		288/131
C0330SW	Small	Water	400/182		326/148
C0530MA	Medium	Air	525/238		380/172
C0530MW	Medium	Water	500/227		410/186
C0530SA	Small	Air	525/238		380/172
C0530SW	Small	Water	500/227		410/186



Polyurethane Insulation

Foam insulation is forced between the wall and liner under heat and pressure to form a perfect wall to wall bond, preserving ice supply for long periods.



Certification














- 3 years parts and labor on all components.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

 $In stall ation \ Note: Allow \ 6'' space \ at \ left, \ back \ and \ right \ side \ for \ ventilation \ and \ utility \ connections.$

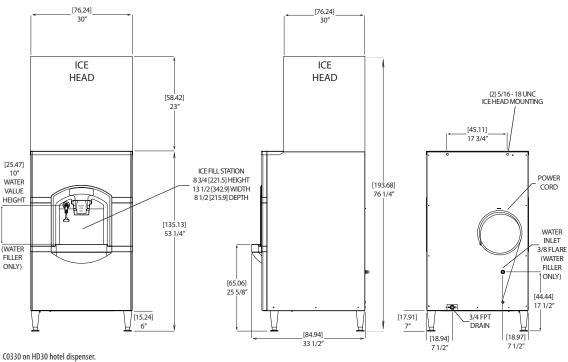

Specifications

	Model Number	Actuation	Application Bin Capacity Ib/kg	Electrical	Circuit Wires	Min. Circuit Ampacity	Max. Fuse Size or HACR Circuit Breaker (amps)
ı	HD30B-1	Push	180/81	115/60/1	2	Cord	15
l	HD30W-1*	Push	180/81	115/60/1	2	Cord	15

^{*}Unit comes with a water spout next to ice chute



All Models

Dimensions (W x D x H):

Unit: 30" x 33.5" x 47.25"

(76.2 x 85.1 x 120.0 cm)

Shipping Carton: 33" x 37" x 53" (83.8 x 94 x 134.6 cm)

Shipping Weight:

HD30B-1: 220 lb / 100 kg HD30W-1: 224 lb / 102 kg



Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

an Ali Group Company



