# meridian 🙏

### **HID525 - Touch-Free Ice & Water Dispenser**

Nugget Ice Machine / Dispenser

### The Meridian® Difference

#### Sanitation:

- Touch-free, infrared dispensing of ice and water eliminates the need to physically touch the dispenser for more sanitary operation
- AgION® and other antimicrobial compounds are molded into key components to help inhibit the growth of microbes, bacteria, mold and algae
- Fully removable bin, spouts, air filter, sink, and grill allow for easy cleaning and maintenance
- Sealed refrigeration system minimizes outside airborne contamination
- Front accessible, removable air filter makes cleaning more convenient

#### Reliability & Ease of Use:

- Sealed, maintenance-free bearings reduce preventative maintenance and ensure maximum reliability
- Produces Scotsman's chewable H<sup>2</sup> Nugget Ice which is slow-melting and designed for reliable dispensing
- Space-maximizing design the industry's smallest operational footprint relative to capacity, featuring specially designed contoured sides for enhanced breathability
- Unit-specific QR code for quick access to service manuals and warranty history
- Durable stainless-steel evaporator and exterior panels, plus larger sink opening and dispensing area
- Enhanced service features Intuitive LED diagnostic lights reduce service time and convenient USB drive allows for fast software updates
- Industry-leading energy and water efficiency along with quieter operation





HID525A-1 with optional KLP24A legs



Touch-free infrared sensor dispensing option, providing more sanitary operation



User controlled antimicrobial push-button dispensing option, providing quick and efficient operation



### 24 Hour Volume Production

A	ir Cooled	d	Water Cooled			
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	
500/227 lb/kg		365/166 lb/kg	500/227 lb/kg		400/181 lb/kg	_



			Storage		Max. Fuse Size		Energy Consumption		· Usage o (liters/45.4 kg)
Model Number	Condenser Unit	Dispensing Method	Capacity lb/kg	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Min. Circuit Amps	kWh/100 lb 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C	Condenser )/70°F(21°C)
HID525A-1	Air	Touch-Free Sensor	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525AB-	-1 Air	<b>Button Activated</b>	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525AW	/-1* Air	Touch-Free Sensor	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525W-1	1 Water	Touch-Free Sensor	25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3
HID525WB	-1 Water	Button Activated	25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3

\*Wall mount configuration. Does not have or accept a drip tray. Unit designed to be installed over existing sink.



3/4" x 5/16" x 3/8" (1.9 x 0.8 x 0.95 cm)

Chewable, slow-melting ice that allows for more

reliable dispensing.





- $\bullet$  3 years parts and labor.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor




- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •


#### Without Wall Mount: HID525A(B) & HID525W(B)


Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.


All models include 7.5' power cord with NEMA 5-15P plug

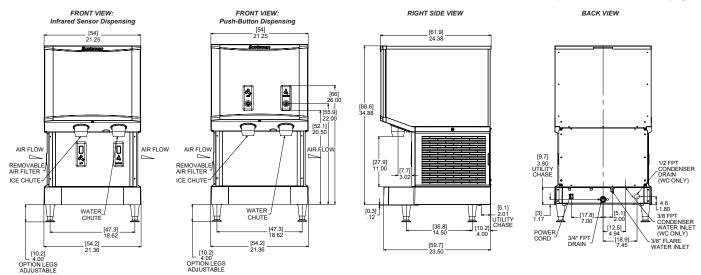

#### With Wall Mount: HID525AW







### **All Models**

#### Dimensions (W x D x H):

Unit:

HID525A(B)-1: 21.25" x 24.38" x 35" HID525AW-1: 23.25" x 24.38" x 35" HID525W(B)-1: 21.25" x 24.38" x 35"

Shipping Carton:

HID525A(B)-1: 24.25 x 27.13 x 41.5 HID525AW-1: 24.25 x 27.13 x 41.5 HID525W(B)-1: 24.25 x 27.13 x 41.5

Shipping Weight: HID525A(B)-1: 208 lb / 95 kg HID525AW-1: 213 lb / 97 kg

R-404A

HID525W(B)-1: 208 lb / 95 kg

BTUs per hour: 6,800

-6

Model Number

KLP24A

HST21-A

HST21B-A

## **Operating Requirements**

4" Adjustable legs, box of 4, plastic with metallic foot.

Machine stand for HID525 and HID540, basic version.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details

Machine stand for HID525 and HID540, with locking reversible door and shelf.

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Potable Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-5%	+10%	

Specifications and design are subject to change without notice

Accessories

Description

### • 101 Corporate Woods Parkway, Vernon Hills, IL 60061

• 1-800-SCOTSMAN Fax: 847-913-9844

Refrigerant:

• www.scotsman-ice.com customer.relations@scotsman-ice.com

The Spirit of Eventlenes

an Ali Group Company

SIS-SS-MRD-HID525 09-20