

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

## Pass Thru Solid Door Refrigerators

Reach-In Top Mount  
 Pro Series

**Model : PRO-26R-PT**

### FEATURES & BENEFITS

#### ■ Self-cleaning condenser device **Only at Turbo Air**

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The self-cleaning condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

#### ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originate from cold air leaks.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Automatic evaporator fan motor delays.

#### ■ All stainless steel cabinet construction

The Turbo Air Pro model boasts all stainless steel interior and exterior (galvanized steel top, bottom and back). It guarantees the utmost in cleanliness and long product life. The Pro model can add a touch of style to the most refined setting.

#### ■ Sturdy, clean stainless steel shelving **Only Turbo Air models**

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air Pro Series uniquely provides stainless steel shelving.

#### ■ Hot gas condensate system **Only Turbo Air models**

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but thoroughly prevents the overflow of condensate water.

#### ■ Cold air distribution system

#### ■ Door pressure release device

#### ■ Efficient refrigeration system

Pro Series's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### ■ LED interior lighting

#### ■ Top mount compressor



**Self-Cleaning  
 Condenser**



**NO MAINTENANCE REQUIRED**

**Refrigerator holds 33°F ~ 38°F for the  
 best in food preservation**




| Model      | Swing Door | CU./FT. | #of Shelves | HP  | AMPS | Crated Weight (lbs.) | L x D x H † (inches) |
|------------|------------|---------|-------------|-----|------|----------------------|----------------------|
| PRO-26R-PT | 2          | 25      | 3           | 1/3 | 5.2  | 406                  | 28 3/4 x 36 1/4 x 78 |

# Pass Thru Solid Door Refrigerators

Reach-In Top Mount  
Pro Series

## Model : PRO-26R-PT

| ELECTRICAL DATA             |  |
|-----------------------------|--|
| Voltage                     | 115/60/1   |
| Plug Type                   |  NEMA 5-15P |
| Full Load Amperes           | 5.2  |
| Compressor HP               | 1/3  |
| Feed Wires with Ground      | 3  |
| Cord Length (ft.)           | 9  |
| Refrigerant                 | R-134A   |
| DIMENSIONAL DATA            |  |
| # of Doors                  | 2  |
| # of Racks Accepted         | 1  |
| Net Capacity (cu. ft.)      | 25   |
| Ext. Length Overall (in.)   | 28 3/4 (730mm)   |
| Ext. Depth Overall (in.) *  | 36 1/4 (920mm)   |
| Ext. Height Overall (in.) † | 78 (1981mm)  |
| Int. Length Overall (in.)   | 24 3/4 (630mm)   |
| Int. Depth Overall (in.)    | 31 1/2 (800mm)   |
| Int. Height Overall (in.)   | 58 3/4 (1493mm)  |
| Net Weight (lbs.)           | 355  |
| Gross Weight (lbs.)         | 406  |
| # of Shelves                | 3  |
| Shelf Size (L x D) (in.)    | 22 x 26 1/2  |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-1/8" for door handles.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor


- Door locks standard
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design
- Legs available (optional)
- Full and half pan racks available (optional)

### ■ OPTIONAL ACCESSORIES :


- ☐ 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- ☐ 6" stainless steel leg: 30221M0600
- ☐ Additional stainless steel shelf: S2PT150100
- ☐ Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans- sold separately)
- ☐ Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)

## PLAN VIEW

(unit : inch)

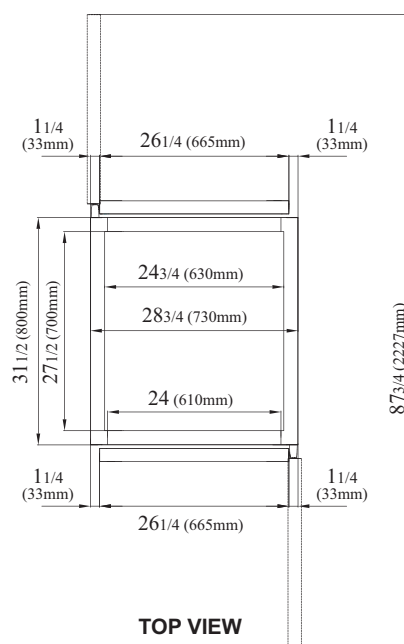

TOP VIEW

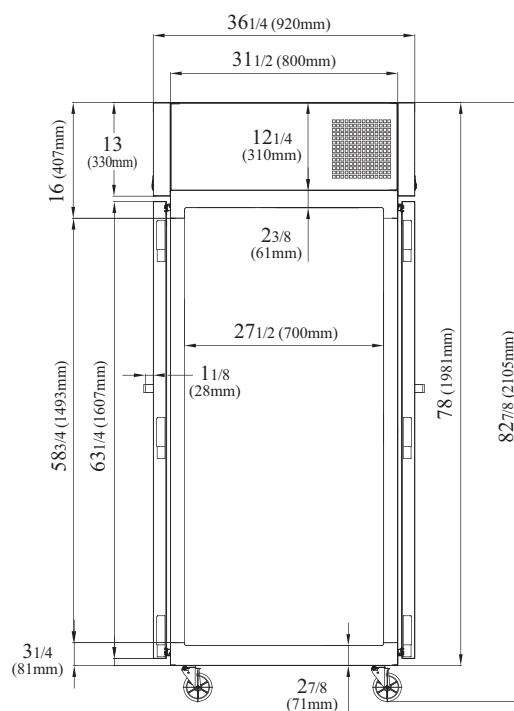

SIDE VIEW

Ver.201606



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

REFRIGERATOR MANUFACTURER  
**GERMAN KNIFE**

REFRIGERATOR MANUFACTURER  
**RADIANCE**

REFRIGERATOR MANUFACTURER  
**GREEN WORLD**

AIR CONDITIONER MANUFACTURER  
**Turbo air**