

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :	
Model #:	
Item#:	Qty:
Available W/H :	
Approval:	

Ice Merchandiser

Ice Merchandisers Glass Door Merchandisers

Model: TGIM-23

___ FEATURES & BENEFITS =__

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originate from cold air leaks.
- · Digital display allows for easy monitoring.
- · Programs interpret the condition of refrigeration systems by self-diagnosis.
- · Smart fuzzy defrost system.
- · Automatic evaporator fan motor delays.

■ Ice does not melt even in hot climates

Turbo Air ice merchandisers are based on a freezer system which is adjusted to the ideal temperature range for bagged ice storage, whereas our competitors use refrigerator based systems. It maintains an avg. temperature of 12°F or below and eliminates ice melting problems during hot weather conditions.

■ Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

■ Efficient refrigeration system

Turbo Air's freezers are designed with oversized and balanced (CFC Free R-134A or R-404A) refrigeration systems. These include efficient evaporators and condensers for faster freezing and greater efficiency.

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

LED lighting interior

Magnetic door gaskets

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

Bottom mount compressor units

Turbo Air's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.

Freezer holds 10°F ~ 15°F for the best in bagged ice storage













	intertex Intertex					
Model	Swing Door	CU./FT.	НР	AMPS	Crated Weight (lbs.)	L x D*x H (inches)
TGIM-23	1	21.1	1/3	6.5	356	27 x 293/4 x 781/4

Ver.201601 * Depth does not include 1-3/8" for door handle

Ice Merchandiser

Model: TGIM-23

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	① NEMA 5-15P				
Full Load Amperes	6.5				
Compressor HP	1/3				
Cord Length (ft.)	7				
Refrigerant	R-134A				
DIMENSIONAL DATA	ENSIONAL DATA				
# of Doors	1				
Net Capacity (cu. ft.)	21.1				
Ext. Length Overall (in.)	27 (686mm)				
Ext. Depth Overall (in.)*	293/4 (756mm)				
Ext. Height Overall (in.)	78 _{1/4} (1987mm)				
Int. Length Overall (in.)	23 (584mm)				
Int. Depth Overall (in.)	241/8 (614mm)				
Int. Height Overall (in.)	603/8 (1535mm)				
Net Weight (lbs.)	334				
Gross Weight (lbs.)	356				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


■ WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor


■ 4" dia. swivel casters available (optional)

■ OPTIONAL ACCESSORIES:

4" caster, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)

PLAN VIEW (unit: inch)



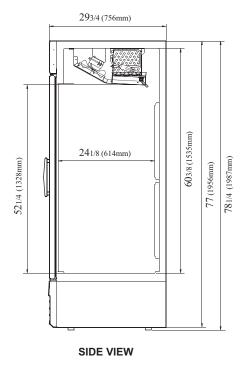

Ver.201601














■ Warranty: 800-381-7770 ■ AC: 888-900-1002











^{*} Depth does not include 1-3/8" for glass door handles.