

|                   |        |
|-------------------|--------|
| Project:          |        |
| Model #:          |        |
| Item #:           |        |
| Available W/H:    | Qty:   |
| Approval:         |        |
| AIA #:            | SIS #: |
| CSI Section 11400 |        |

## Vertical Open Display Cases

Full Heights  
 Solid Side Panel

### Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

### Model : TOM-40B-SP(-A)-N



Night Curtain  
 (Standard)



Security Cover  
 (Optional)



TOM-40B-SP-N



TOM-40B-SP-A-N

### FEATURES & BENEFITS

#### Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

#### Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Modern design

By integrating great contours with durable structures, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics. Safety reinforced tempered glass front shield optimizes the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages. Its elegant contemporary euro design will enhance any store application.

#### Designed to enhance impulsive sales

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

#### Interior materials available in two standards

SP: stainless steel interior for sanitary purposes  
 SP-A: black coated interior with mirrored sides for maximized display effects.

#### LED interior lighting under each shelf

#### Solid side panels used to ensure durability

#### Standard back-guard improves airflow

#### Energy saving night curtain standard

#### Optional security cover available

#### Foamed with polyurethane, high-density cell insulation (CFC free)

#### Perforated interior back wall and top for improved airflow

#### Front air intake and rear air discharge



| Model            | CU./FT. | # of Shelves | HP      | AMPS | Crated Weight (lbs.) | L x D* x H† (inches) |
|------------------|---------|--------------|---------|------|----------------------|----------------------|
| TOM-40B-SP(-A)-N | 14.4    | 4            | 3/4 x 2 | 15.5 | 642                  | 39 1/8 x 27 x 78     |

# Vertical Open Display Cases

Full Heights  
Solid Side Panel

## Model : TOM-40B-SP(A)-N

| ELECTRICAL DATA            |  |
|----------------------------|--|
| Voltage                    | 115/60/1   |
| Plug Type                  |  NEMA 5-20P |
| Full Load Amperes          | 15.5   |
| Compressor HP              | 3/4 x 2  |
| Cord Length (ft.)          | 97/8   |
| Refrigerant                | R-290  |
| DIMENSIONAL DATA           |  |
| Net Capacity (cu. ft.)     | 14.4   |
| Ext. Length Overall (in.)  | 39 1/8 (993mm)   |
| Ext. Depth Overall (in.)*  | 27 (685mm)   |
| Ext. Height Overall (in.)† | 78 (1982mm)  |
| Int. Length Overall (in.)  | 36 5/8 (930mm)   |
| Int. Depth Overall (in.)   | 15 (382mm)   |
| Int. Height Overall (in.)  | 49 7/8 (1267mm)  |
| # of Shelves               | 4  |
| Shelf Size (L x D) (in.)   | 36 1/2 x 12  |
| Net Weight (lbs.)          | 512  |
| Gross Weight (lbs.)        | 642  |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-1/4" for rear spacers.

† Height does not include 5/8" for bolt height.

■ **WARRANTY** : 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor

### ■ STANDARD FEATURES

- Simple plug-in installation
- Patented self-contained system, no plumbing required
- Standard color comes in black only
- Solar powered digital thermometer
- Digital electronic thermostat with defrost control
- Bolt adjustable up to 2 3/4"

\*\* Lead time applies. Please contact your sales representative for more details to order.

### ■ Recommended operating conditions

TOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product. When used as a built-in, required clearance for the rear is 4" and the top is 5".


### ■ OPTIONAL ACCESSORIES

- 1.6" caster: CAS16WBT00 (non-brake)
- 4" caster, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)
- 6" leveling seismic leg (1/2", 13 TPI): 30221M0700
- Security cover: SC-40 (White), SC-40B (Black), SCM-40 (White), SCM-40B (Black), SCS-40
- Price tag channel: P4000000ZK (36 1/2"L)


Ver.20220315

## PLAN VIEW


(unit : inch)

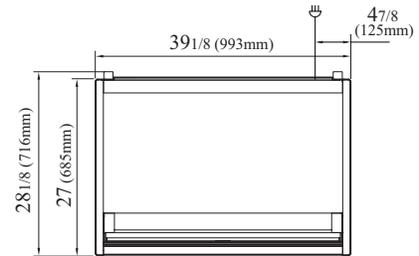

TOP VIEW

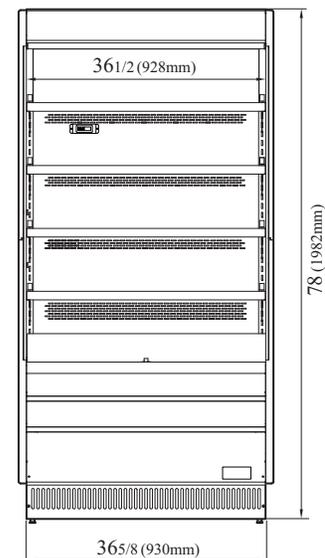

FRONT VIEW

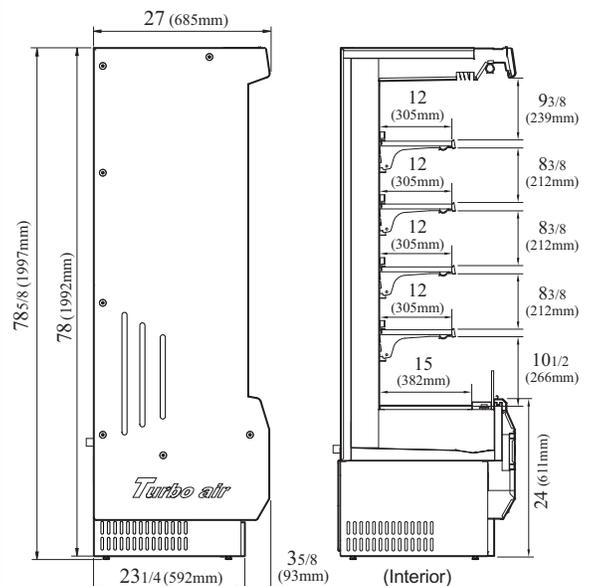

SIDE VIEW



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002



Continued product development may necessitate specification changes without notice.