

PLEXOR M2



Features & Benefits

- Two (2) cooking technologies in one (1) appliance: rapid cook or impingement
- Operated by one (1) 50A or two (2) 30A plugs
- One-touch user interface with icons and text makes training and operation simple
- Ventless – integral recirculating catalytic converters for UL® (KNLZ) listed ventless operation
- Adaptive power management ensures consistent results while power sharing
- Open Kitchen™ ready for IoT compatibility
- Unlimited recipe storage
- Includes single or double plug and cord (6 ft. nominal)



SPECIFICATIONS

PHASE
1 Phase

VOLTAGE
208/240V

CURRENT
30A

MAX CIRCUIT
30A

PLUG
NEMA 6-30P



PHASE
1 Phase

VOLTAGE
208/240V

CURRENT
50A

MAX CIRCUIT
50A

PLUG
NEMA 6-50P



Connectivity Part Numbers

- MDD-1001: Initial piece, two way connectivity bundle
- MDD-1002: Additional piece, two way connectivity bundle
- MDD-1005: Additional year of subscription (PhD SAAS)




This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.

* Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.

† Ventless certification is for all food items except for foods classified as "fatty raw proteins." Such foods include bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

If you have questions regarding ventless certifications or local codes, please email ventless.help@turbochef.com TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

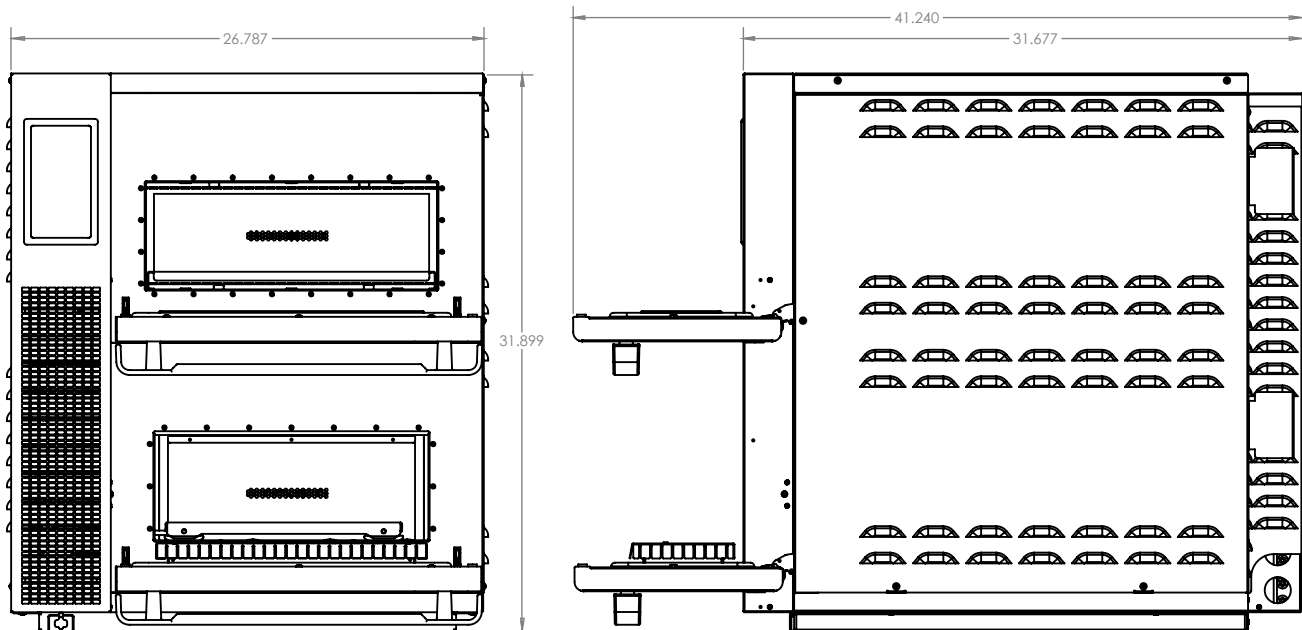

DIMENSIONS

Height	31.89"	810 mm
Width	26.79"	680 mm
Depth	31.67"	804 mm
Weight	380 lb	172 kg

RAPID COOK – COOK CHAMBER

Height	6.14"	156 mm
Width	15.5"	394 mm
Depth	15.42"	392 mm
Volume	0.85 cu.ft.	24.07 liters

IMPINGEMENT – COOK CHAMBER


Height	5.07"	129 mm
Width	16.5"	419 mm
Depth	17.16"	436 mm
Volume	0.83 cu.ft.	23.5 liters

WALL CLEARANCE


Top	0"	0 mm
Sides	0"	0 mm

SHIPPING

Freight Class	175
F.O.B.	Carrollton, TX

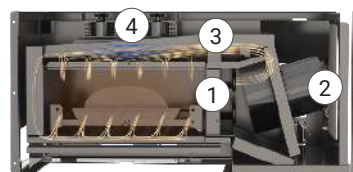

Rapid Cook Module
 1. Heating Elements
 2. Blower Motor
 3. Catalytic Converter
 4. Top-launched Microwave

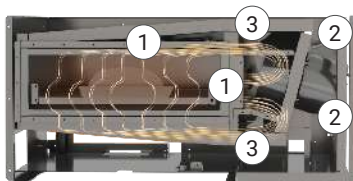

Impingement Module
 1. Heating Elements
 2. Blower Motors
 3. Catalytic Converters