CD40022/40522 - CUBE ICE DISPENSER

Ice-O-Matic
Ice. Pure and Simple

CD40022/40522 CUBE ICE DISPENSER



CD40022 WITH CIM0320

Features

- Only 22" (559 mm) wide.
- Storage 120 lbs (54 kg) of ice per day.
- *Turbo Dispense* dispenses 1/4 lbs of ice per second.
- *Power Clean* allows access to the bin for easy cleaning without moving the ice machine. Interlock safety switch turns off machine agitation when top-front access panel is removed.
- 4" (102 mm) foam insulation for maximum ice preservation — no more quick melting ice.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Great for hard water, food safety and tight spaces.
- User friendly push-to-dispense operation.

Ice Form

CUBE



Full Cube Dimensions	
W x D x H (in.)	7/8 x 7/8 x 7/8
W x D x H (mm)	22 x 22 x 22
Half Cube Dimensions	
W x D x H (in.)	3/8 x 7/8 x 7/8
W x D x H (mm)	10 x 22 x 22


ICE PRODUCTION FOR OPTIONAL CUBE ICE MAKERS—LBS. (KG) PER 24 HOURS*								
Model Number	**ICE0320**	**ICE0325**	**ICE0520**	**ICE0525**	**ICE0826**	**ICE0825**	**ICE1126**	**ICE1125**
Air	313 (142)	290 (132)	561 (254)	529 (240)	896 (406)	922 (418)	932 (423)	937 (425)
Water	316 (143)	N/A	586 (266)	N/A	N/A	N/A	N/A	N/A
Remote	N/A	N/A	N/A	N/A	906 (411)	912 (414)	968 (439)	1035 (469)
Voltage	115/60/1	220-240/50/1	115/60/1	220-240/50/1	208-230/60/1	220-240/50/1	208-230/60/1	220-240/50/1

**Tested at 70°F Air/50°F Water.*
All specifications and performance data are subject to normal manufacturing variances.
Daily ice production based on half cube configuration.

CD40022/40522 - CUBE ICE DISPENSER

Ice-O-Matic
Ice. Pure and Simple

CD40022/40522 CUBE ICE DISPENSER

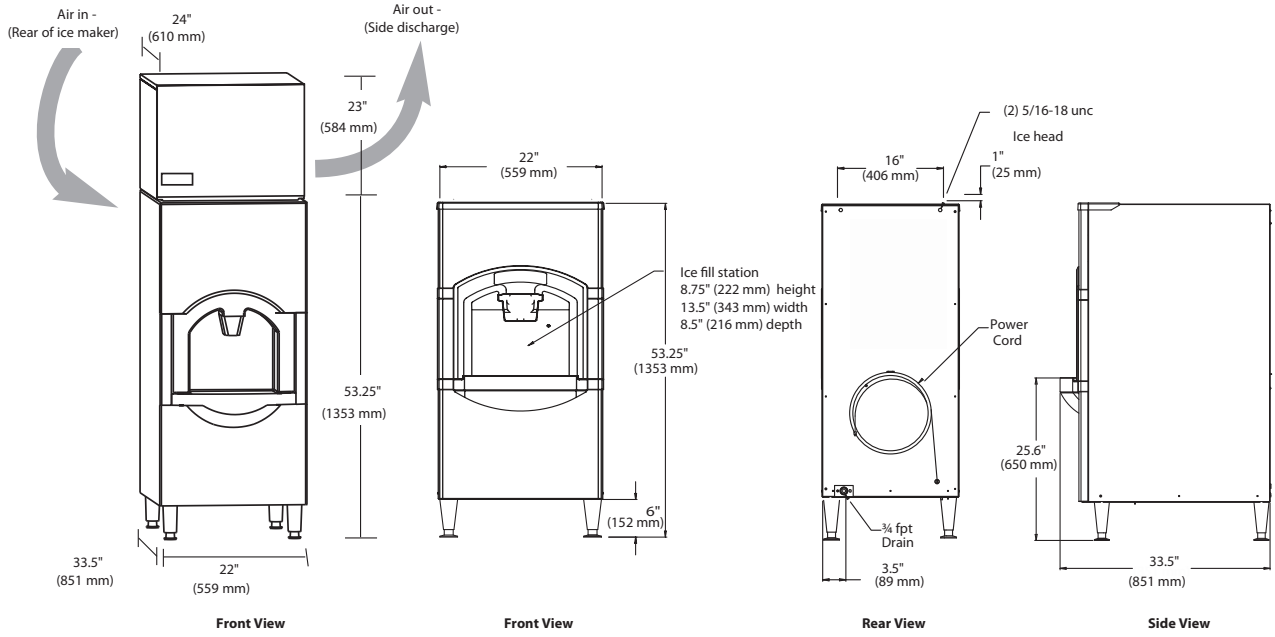

Operating Requirements

	MINIMUM	MAXIMUM	
		60 Hz	50Hz
Ambient Temp. Range Air	50˚F (10˚C)	100˚F (38˚C)	110˚F (43˚C)
Water Temp.	40˚F (4.4˚C)		90˚F (32˚C)
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)	

Dimensions (dispenser only)

ALL MODELS	
W x D x H (in.)	22 x 33.5 x 53.25
W x D x H (mm)	559 x 851 x 1,353

Specifications

Model Number	Dispenser Operation	ARI Bin Storage lbs (kg)	Voltage Characteristics	Min. Circuit Ampacity	Max Fuse Size
CD40022*	Push	120 (55)	115/60/1	2.1	15
CD40522	Push	120 (55)	230/50/1	2.1	15

Note #1: Model CD40022 and CD40522 dispensers accept all 22" CIM Series™ Cube Ice Makers.
Note #2: CD40022 and CD40522 Series units do not require an Adaptor and Bin Level Kit.

NOTES:
Number of Wires: 3 (including ground)
Approx. Shipping Weight lbs (kg): 230 (105)
Refrigerant Type: R404A
*Cordset included

11100 E. 45th Avenue • Denver, CO 80239 • Phone: 1. 866. PURE. ICE • Fax: 303. 371. 6296 • www.iceomatic.com

Rev: 06/18
Part: 4005